


### Double Ridge Bend Waveguide

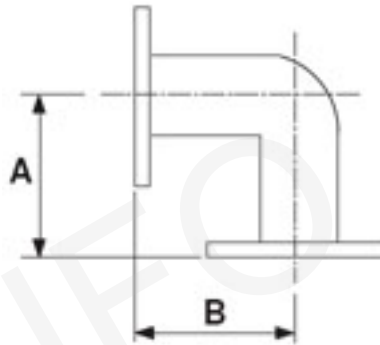

Standard Models				
P/N	Frequency Range (GHz)	Waveguide	VSWR	Size A,B (mm)
650DRWB-A-B	6.5-18.0	WRD650D28	1.20	Customized
750DRWB-A-B	7.5-18.0	WRD750D24	1.20	Customized

Ordering Information	
<p><b>P/N:</b></p> <p><b>650</b>   <b>DRWB</b>   -   <b>A</b>   -   <b>B</b></p> <p>WR Size      Product Code      Size A (mm)      Size B (mm)</p> <p><b>Example:</b> 650DRWB-100-100 is a WRD650D28 double ridge Bend waveguide. Size A is 100mm, B is 100mm.</p> <p>Note:</p> <ol style="list-style-type: none"> <li>1. Customization is available;</li> <li>2. For detailed information of each double ridge bend waveguide, please visit the website: <a href="http://www.ainfoinc.com">www.ainfoinc.com</a></li> </ol>	<p>AINFO manufactures wide variety of double ridge bend waveguide assemblies specially designed for every customers unique requirements. Double Ridge Bend Waveguide can be assembled with many types of flange. We also offer many other special configurations, length and hole size to meet special requirements.</p>