


Double Ridge Straight Waveguide

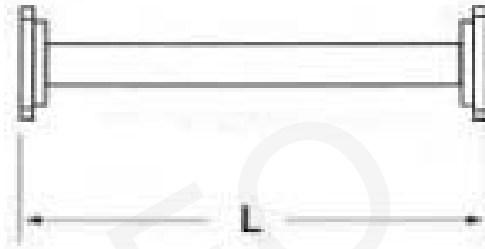

Standard Models				
P/N	Frequency Range (GHz)	Waveguide	VSWR	Length (XXX) (mm)
250DRWAL-XXX	2.6-7.8	WRD250D30	1.15	Customized
350DRWAL-XXX	3.5-8.2	WRD350D24	1.15	Customized
475DRWAL-XXX	4.75-11.0	WRD475D24	1.15	Customized
580DRWAL-XXX	5.8-16.0	WRD580D28	1.15	Customized
650DRWAL-XXX	6.5-18.0	WRD650D28	1.15	Customized
750DRWAL-XXX	7.5-18.0	WRD750D24	1.15	Customized
180DRWAL-XXX	18.0-40.0	WRD180C24	1.15	Customized

Ordering Information

P/N: 250 DRWAL - XXX
 WR Size Product Length
 Code (mm)

Example: 250DRWAL-500 is a WRD250D30 double ridge straight waveguide. Length is 500mm.

Note:
 1. Customization is available;
 2. For detailed information of each double ridge straight waveguide, please visit the website: www.ainfoinc.com

AINFO manufactures wide variety of double ridge straight waveguide assemblies specially designed for every customers unique requirements. Double Ridge Straight Waveguide can be assembled with many types of flange. We also offer many other special configurations, length and hole size to meet special requirements.