


Technical Specification

Frequency Range(GHz)	13~15
TSS(dBm)	-50
Flatness vs Frequency(dB)	±0.5
Input VSWR	2:1
Sensitivity(mV/μW)	0.5
Polarity	Negative
Input Impedance(Ω)	50
Output Impedance(KΩ)	3-5
Capacitance(pF)	120
Maximum Input Power(dBm)	+20
Connector	SMA-Male/SMA-Female
Net Weight(Kg)	0.015 Around

Outline Drawing (Size: mm)

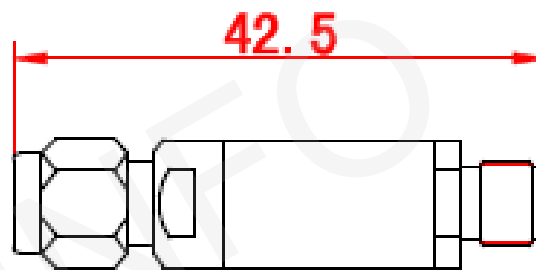

SMA (m) - SMA (f)

Test Results

Sensitivity(mV/uW)	Flatness vs Frequency(dB)	VSWR
0.57	±0.28	1.57