



Test report is for reference only.


TEST REPORT
For
JXWBLB-T-BP-5800-120/T-6CS



Technical Specification

Center Frequency (f0)(MHz)	5800
3dB Bandwidth(MHz)	120
Poles	6
Insertion Loss @ f0(dB)	2.5 max
Rejection(dB@ MHz)	30 min @ 5680 30 min @ 5920
VSWR	1.5 max @ 80% bandwidth
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +70
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.05 Around

Outline Drawing (Size: mm)

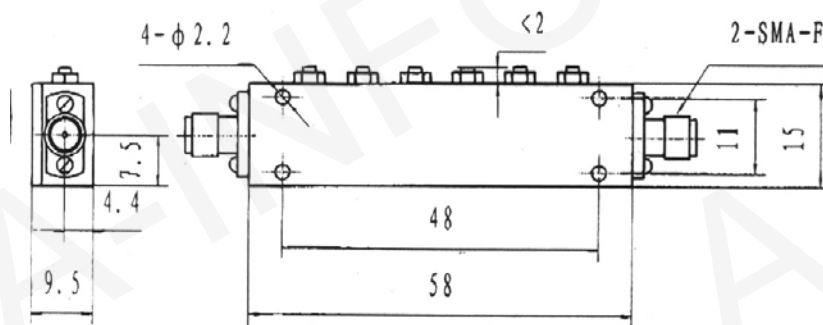

Test Results

Temperature(°C)	F0(MHz)	Lr0(dB)	3dB BW (MHz)	Rejection(dB)		VSWR
				5.68GHz	5.92GHz	
-40	5804.35	-1.00	130.37	-42.5	-39.8	1.40
+70	5796.77	-1.27	129.63	-38.9	-43.8	1.37
+16	5800.43	-1.12	129.99	-40.8	-41.7	1.39