


## Outline Drawing (Size: mm)

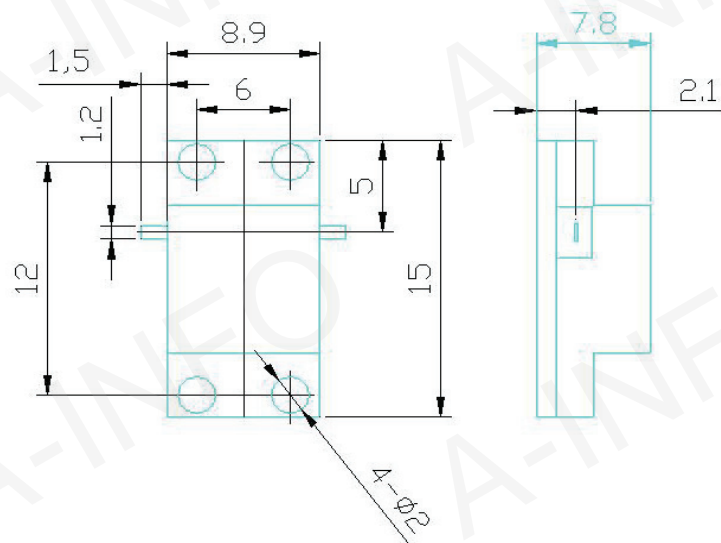

## Test Results Table

Item	Technical Specification	Test Results
Frequency Range(GHz)	8-12	8-12
Bandwidth	Full	Full
Insertion Loss(dB)	0.5 max	0.48 max
Isolation(dB)	20 min	21 min
VSWR	1.25 max	1.23 max
Power Forward(W)	20	20
Power Reverse(W)	5	5
Directivity	Clockwise	Clockwise
Connector	Drop-In	Drop-In
Operating Temperature(°C)	-20 ~ +60	-20 ~ +60