


Outline Drawing (Size: mm)

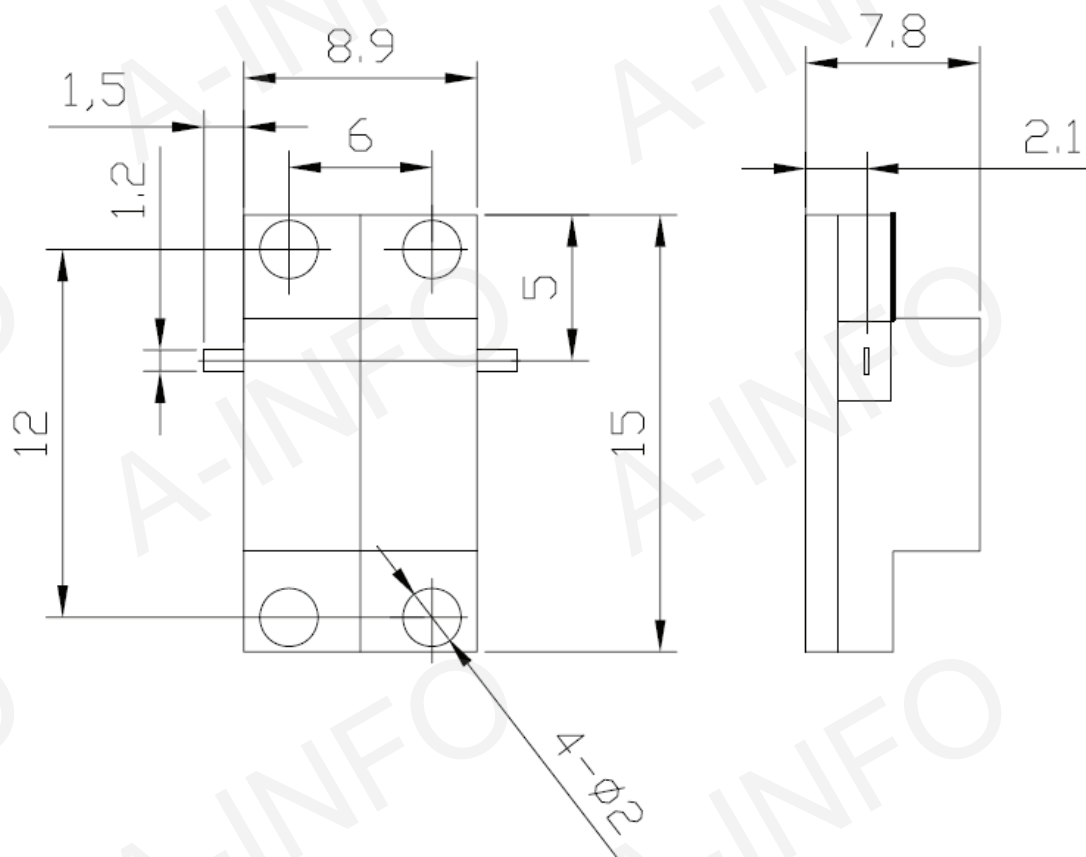

Test Results

Item	Technical Specification	Test Results
Frequency Range(MHz)	9500-11700	9500-11700
Insertion Loss(dB)	0.4 max	0.35 max
Isolation(dB)	20 min	20 min
Forward Power(W)	20	20
Reverse Power(W)	20	20
VSWR	1.25 max	1.22 max
Connectors	Drop-In	Drop-In
Operating Temperature(°C)	-40 ~ +70	-40 ~ +70