


## Outline Drawing (Size: mm)

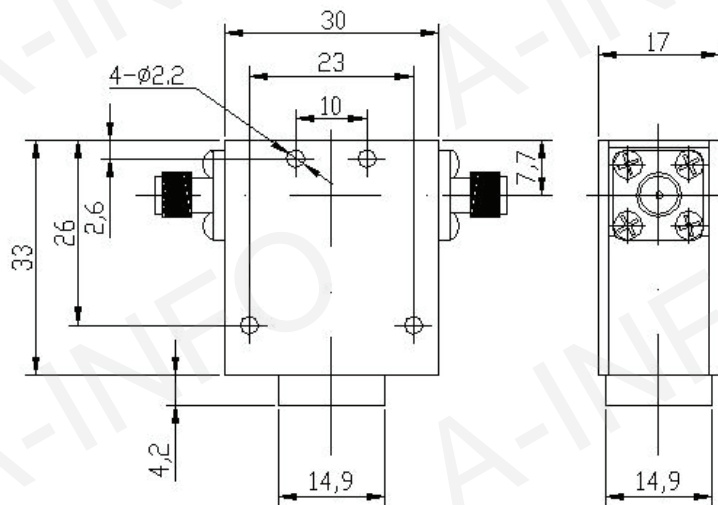

## Test Results Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	1150-1220	1150-1220
Insertion Loss(dB)	0.5 max	0.32 max
Isolation(dB)	20 min	24 min
VSWR	1.20 max	1.17 max
Forward Power(W)	1 CW	1 CW
Connector	SMA-Female	SMA-Female
Temperature Range(°C)	-40 ~ +70	-40 ~ +70