


## Outline Drawing (Size: mm)

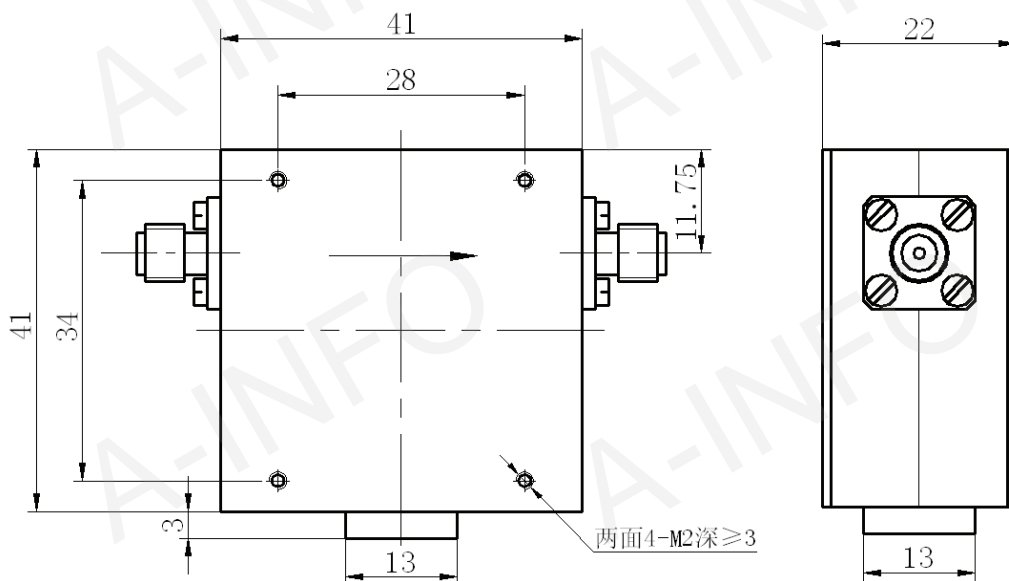

## Test Results Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	1500-2500	1500-2500
Insertion Loss(dB)	0.5 max@25°C	0.35 max@25°C
	0.8 max@ -15°C	0.52 max@ -15°C
Isolation(dB)	18 min	19 min
VSWR	1.35: 1 max @ 25°C	1.20: 1 max @ 25°C
	1.4:1 max @ +70°C	1.31:1 max @ +70°C
Forward Power(W)	50	50
Reverse Power(W)	5	5
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-10 ~ +70	-10 ~ +70