




Test report is for reference only.

**TEST REPORT**  
**For**  
**JXWBGL-T-1900-2200-23-5**

## Technical Specification

Frequency Range(MHz)	1900 – 2200
Insertion Loss(dB)	0.4 max
VSWR	1.2 max
Isolation(dB)	23 min
Forward Power(W)	5CW
Reverse Power(W)	5 CW
Input Connector	SMA-Female
Output Connector	SMA-Female
Temperature Range(°C)	-40 ~ +70
Net Weight(Kg)	0.05 Around

## Outline Drawing (Size: mm)

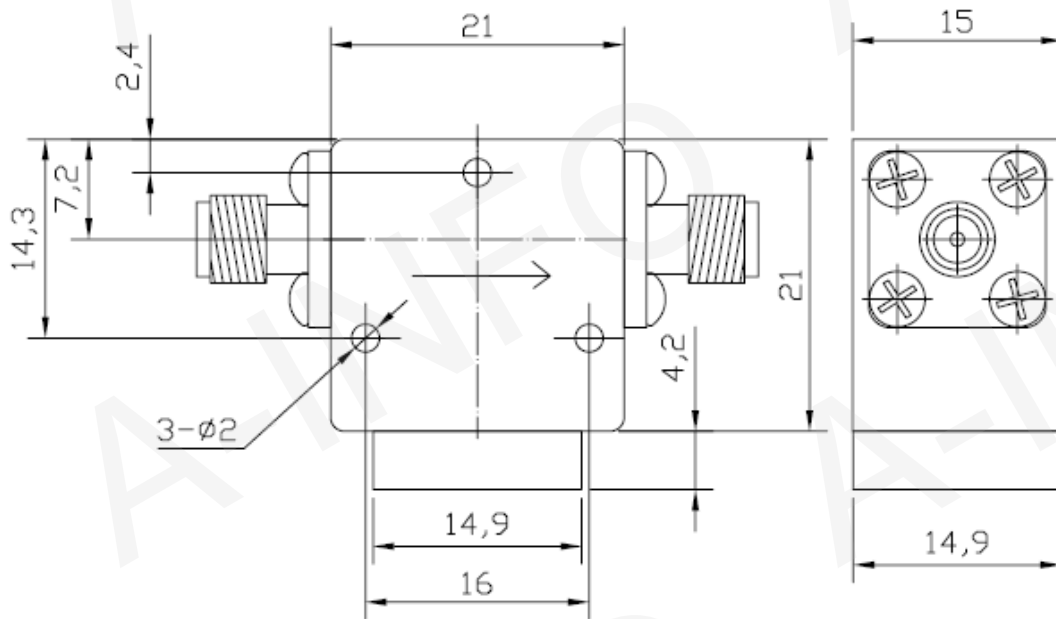

## Test Results

Insertion Loss(dB)	Isolation(dB)	VSWR
0.48	25	1.20