


## Outline Drawing (Size: mm)

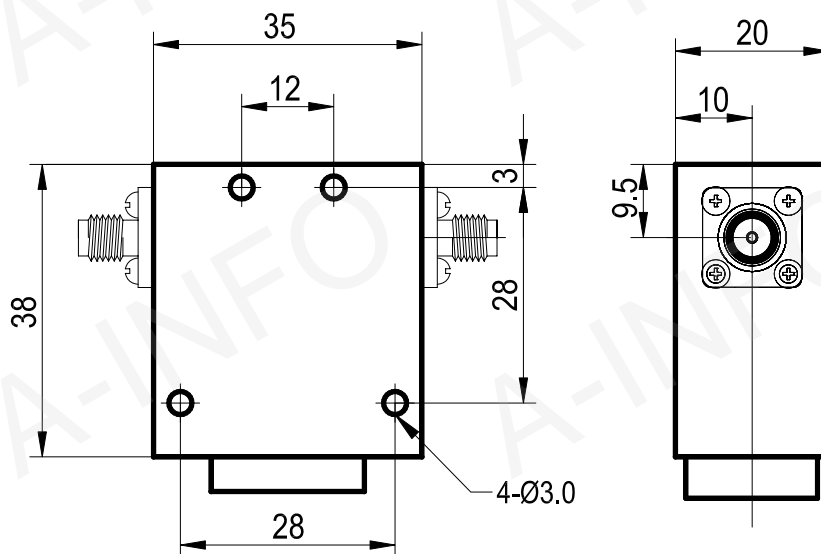

## Test Result Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	498-502	498-502
Insertion Loss(dB)	0.4 max	0.37 max
VSWR	1.25 max	1.15 max
Isolation(dB)	20 min	23.5 min
Power Forward(W)	10	10
Power Reverse(W)	2	2
Connectors	SMA-Female	SMA-Female
Temperature Range(°C)	-5 ~ +35	-5 ~ +35