


Outline Drawing (Size: mm)

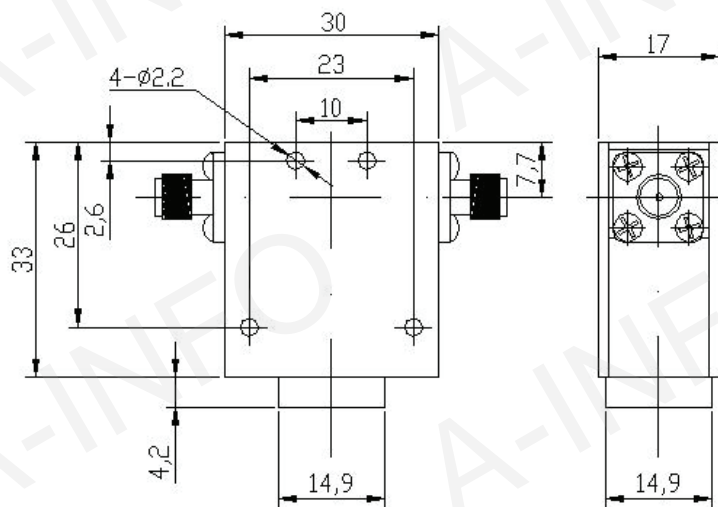

Test Results Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	850-1150	850-1150
Insertion Loss(dB)	0.6 max	0.38 max
Isolation(dB)	18 min	18 min
VSWR	1.30 max	1.25 max
Forward Power(W)	1 CW	1 CW
Connector	SMA-Female	SMA-Female
Temperature Range(°C)	-40 ~ +70	-40 ~ +70