


## Outline Drawing (Size: mm)

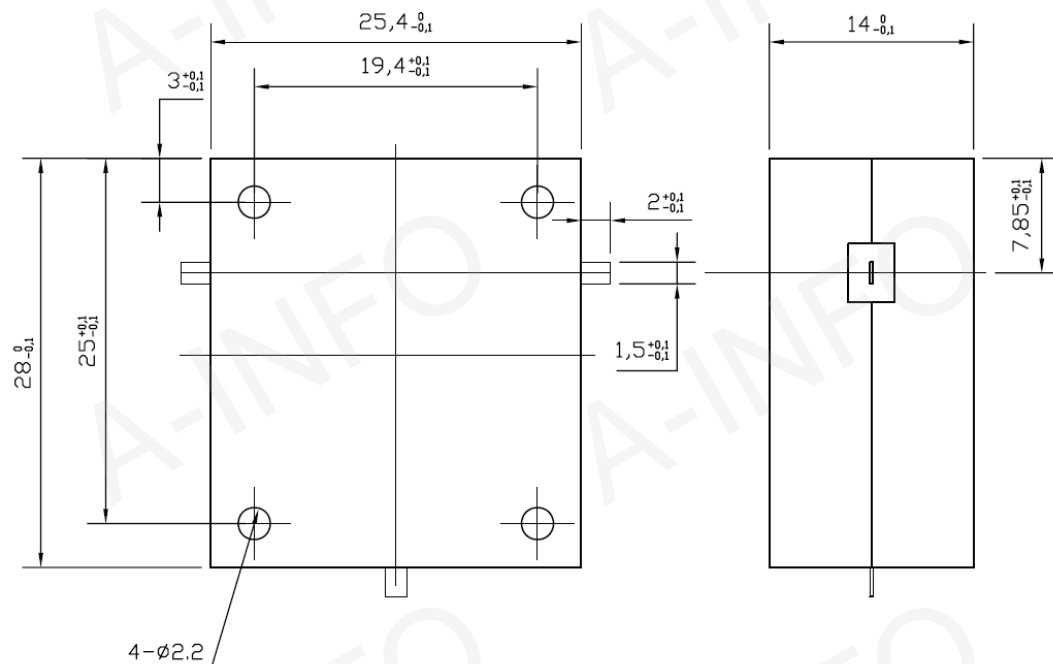

## Test Result Table

Item	Technical Specification	Test Results
Frequency Range(GHz)	3-6	3-6
Insertion Loss(dB)	0.6 max	0.48 max
Isolation(dB)	18 min	21.0 min
VSWR	1.35 max	1.30 max
Forward Power(W)	100 CW	50 CW
Reverse Power(W)	50 CW	20 CW
Connector	Drop-In	Drop-In
Operating Temperature(°C)	-40 ~ +70	-40 ~ +70
Storage Temperature(°C)	-55 ~ +85	-55 ~ +85