


Test report is for reference only.


TEST REPORT
For
JXWBHX-D-5000-6000-20-10

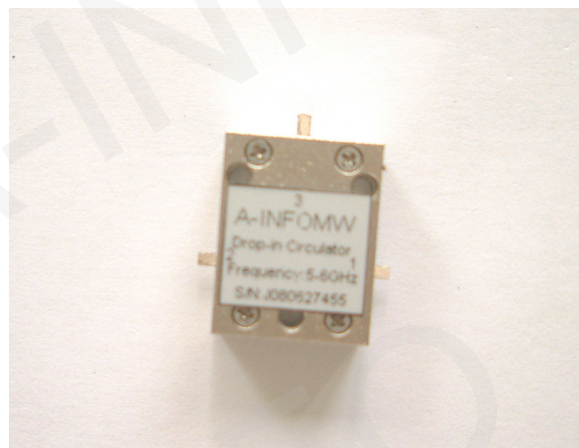

Technical Specification

Frequency Range(MHz)	5000-6000
Insertion Loss(dB)	0.40max
VSWR	1.22 max
Isolation(dB)	20 min
Forward Power(W)	10
Reverse Power(W)	5
Operating Temperature(°C)	-40~+70
Storage Temperature(°C)	-55~+85
Direction	Clockwise
Tolerance(mm)	+/-0.2
Net Weight(Kg)	0.01 Around

Outline Drawing (Size: mm)

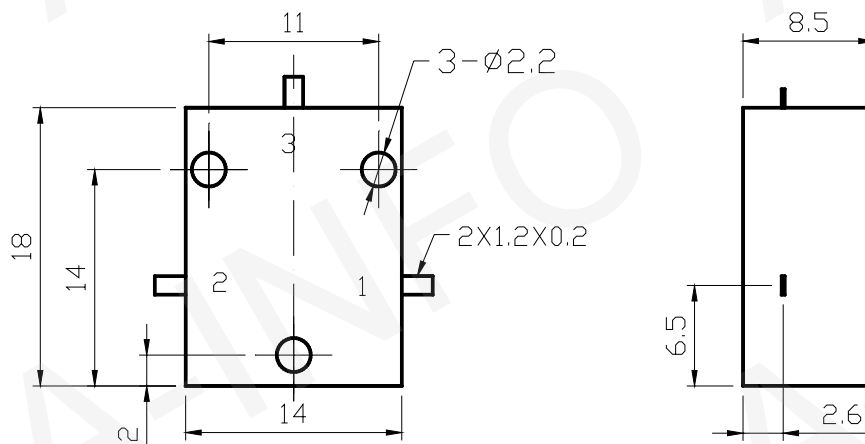

Test Results

+25 °C			-40 °C			+70 °C		
Insertion Loss (dB)	VSWR	Isolation (dB)	Insertion Loss (dB)	VSWR	Isolation (dB)	Insertion Loss (dB)	VSWR	Isolation (dB)
0.33	1.18	21.5	0.34	1.17	21.1	0.32	1.20	20.9