


Outline Drawing (Size: mm)

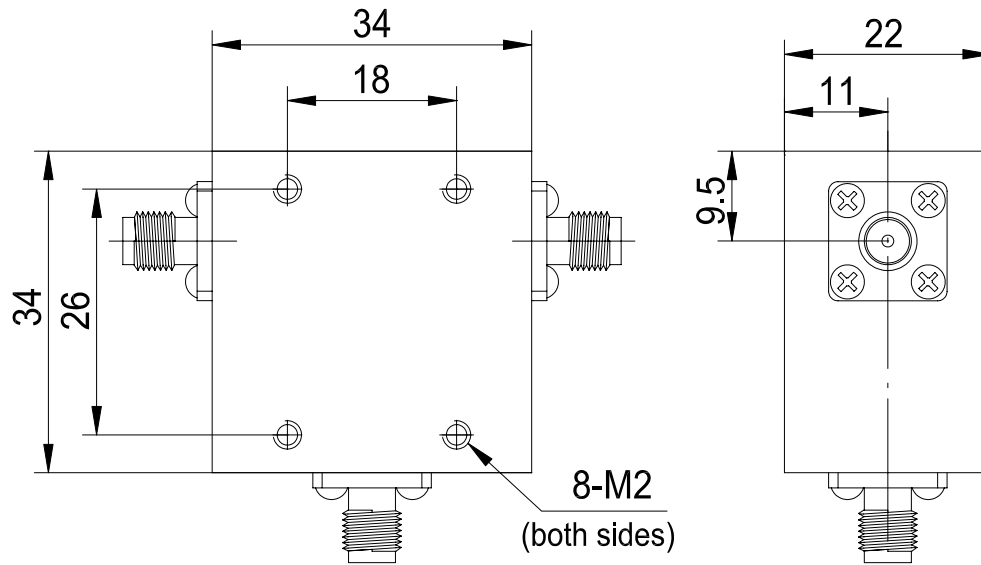

Test Results Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	1350-1850	1350-1850
Insertion Loss(dB)	0.5 max	0.48 max
Isolation(dB)	18 min	19.8 min
Forward Power(W)	60	60
Reverse Power(W)	30	30
VSWR	1.3 max	1.22 max
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +70	-40 ~ +70