


## Outline Drawing (Size: mm)

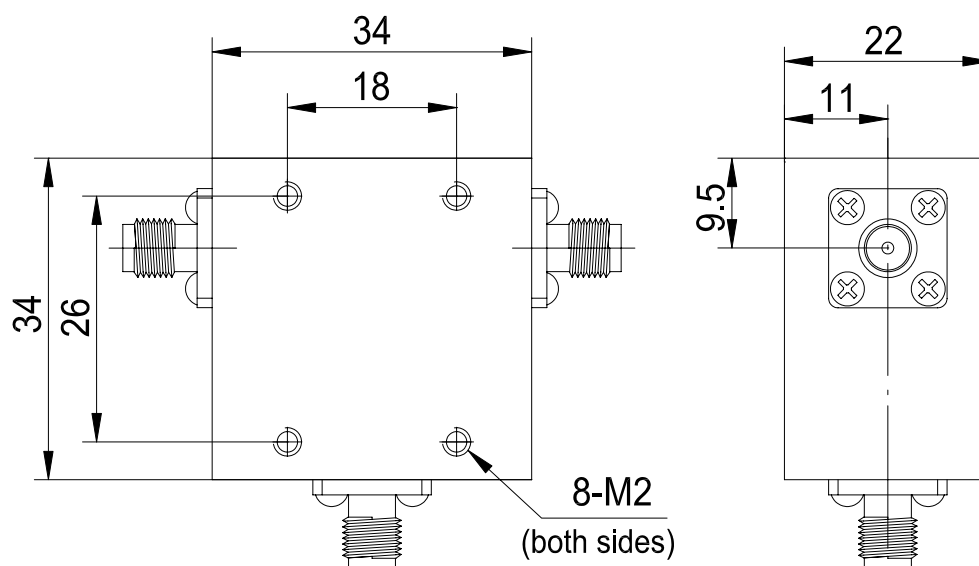

## Test Results Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	1700-2500	1700-2500
Insertion Loss(dB)	0.6 max	0.53 max
Isolation(dB)	17 min	17.2 min
Forward Power(W)	150	150
Reverse Power(W)	60	60
VSWR	1.3 max	1..28 max
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +85	-40 ~ +85