


Outline Drawing (Size: mm)

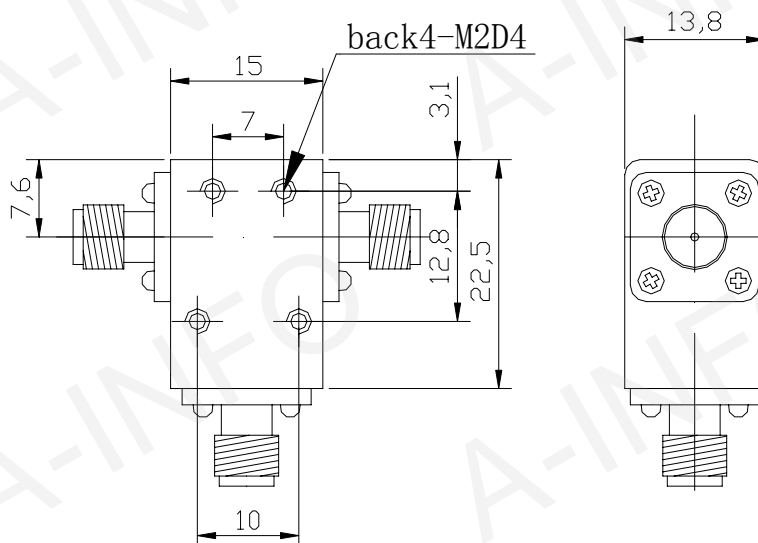

Test Results Table

Item	Technical Specification	Test Results
Frequency Range(GHz)	5.0-6.0	5.0-6.0
Insertion Loss(dB)	0.5 max	0.3 max
Isolation(dB)	20 min	21 min
VSWR	1.25 max	1.20 max
Power Handling(W)	2 max	2 max
Connector	SMA-Female	SMA-Female
Direction	Clockwise	Clockwise
Operating Temperature(°C)	-30 ~ +70	-30 ~ +70