


Outline Drawing (Size: mm)

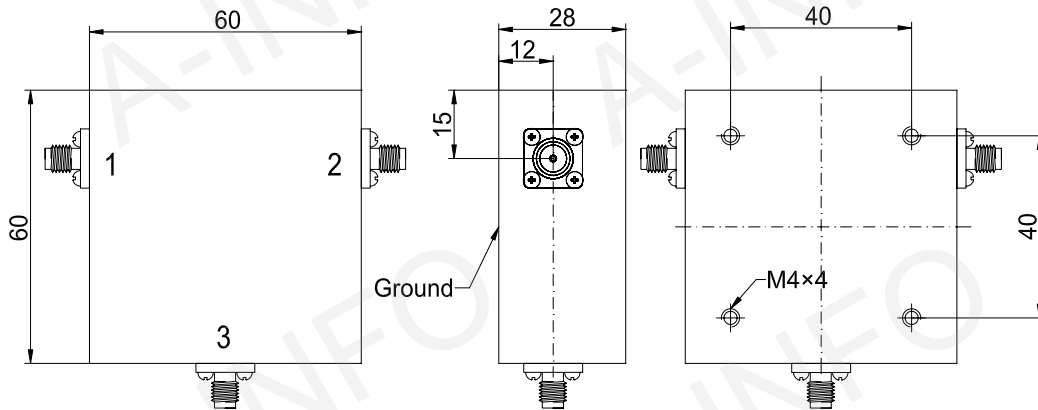

Test Result Table

| Item | Technical Specification | Test Results | | |
|---------------------------|-------------------------|--------------|------------|------------|
| | | 1-2 | 2-3 | 3-1 |
| Frequency Range(MHz) | 75-85 | 75-85 | 75-85 | 75-85 |
| Insertion Loss(dB) | 1.0 max | 0.95 max | 0.97 max | 0.96 max |
| Isolation(dB) | 20 min | 20.6 min | 21.6 min | 20.6 min |
| VSWR | 1.30 max | 1.09 max | 1.09 max | 1.10 max |
| Power Handling(W) | 30 CW | 30 CW | 30 CW | 30 CW |
| Connectors | SMA-Female | SMA-Female | SMA-Female | SMA-Female |
| Operating Temperature(°C) | 0 ~ +50 | 0 ~ +50 | 0 ~ +50 | 0 ~ +50 |
| Storage Temperature(°C) | -10 ~ +70 | -10 ~ +70 | -10 ~ +70 | -10 ~ +70 |