


Outline Drawing (Size: mm)

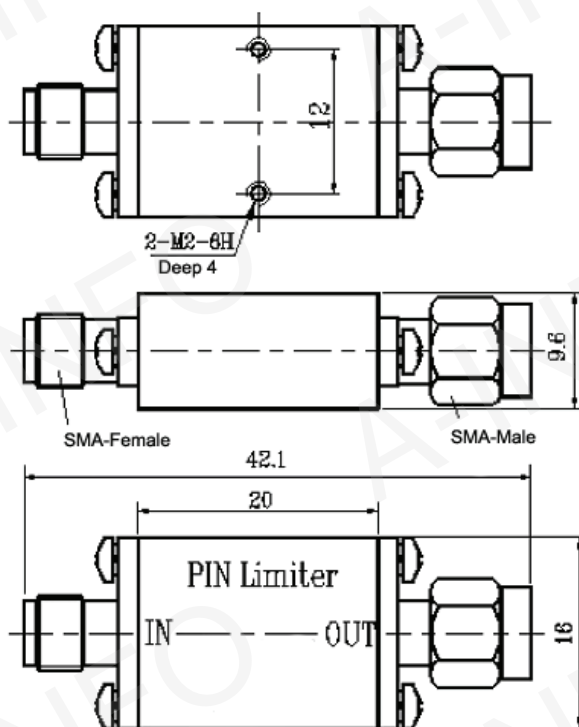

Test Result Table

Item	Technical Specification	Test Results
Frequency Range(GHz)	8.9-9.5	8.9-9.5
VSWR	1.4 max	1.23
Insertion Loss(dB)	1.0 max	0.92
Flat Leakage(mW)	50 max	50 max
Spike Leakage(mW)	100 max	100 max
Recovery Time(us)	0.2	0.2
Peak Power(W)	20	20
Duty Cycle	0.1%	0.1%
Connector	SMA-Male/Female	SMA-Male/Female
Operating Temperature(°C)	-55 ~ +85	-55 ~ +85