



Test report is for reference only.


TEST REPORT
For
JXWBKG-8-213-111



Technical Specification

Frequency Range(GHz)	2~18
Insertion Loss(dB)	5.2 max
VSWR	2.2 max
Isolation (dB)	60 min
Power Handling(W)	0.2
Switching Speed(ns)	100
Connectors	SMA-Female
Operating Temp.(°C)	-40 ~ +85
Storage Temp.(°C)	-65 ~ +125
Net Weight(Kg)	0.15 Around

Outline Drawing (Size: mm)

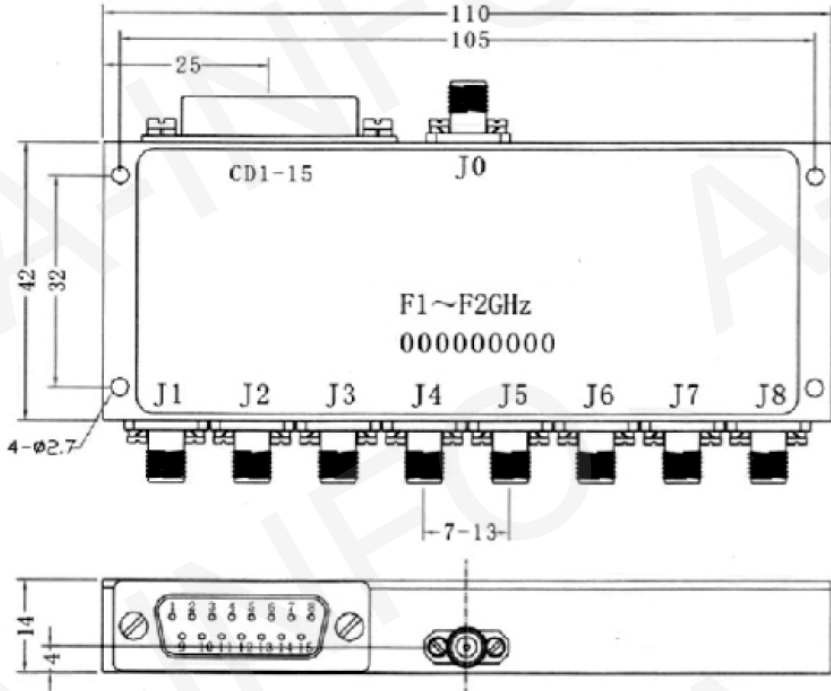

Test Results

Frequency(GHz)	Port	Insertion Loss(dB)	VSWR	Isolation(dB)	Switch Speed(ns)
2-18	J0-J1	4.76	1.93	70.3	<100
	J0-J2	4.85	1.83	70.5	<100
	J0-J3	4.89	1.92	70.5	<100
	J0-J4	4.90	1.71	72.0	<100
	J0- J5	4.95	1.78	71.6	<100
	J0- J6	4.91	1.78	70.5	<100
	J0- J7	4.80	1.75	71.1	<100
	J0- J8	4.79	1.70	70.6	<100

Control :

CD1-15

Port	C3	C2	C1
#1	0	0	0
#2	0	0	1
#3	0	1	0
#4	0	1	1
#5	1	0	0
#6	1	0	1
#7	1	1	0
#8	1	1	1
#9			
#10			
#11			
#12			
#13	+5V		
#14	-5V		
#15	GND		