


## Outline Drawing (Size: mm)

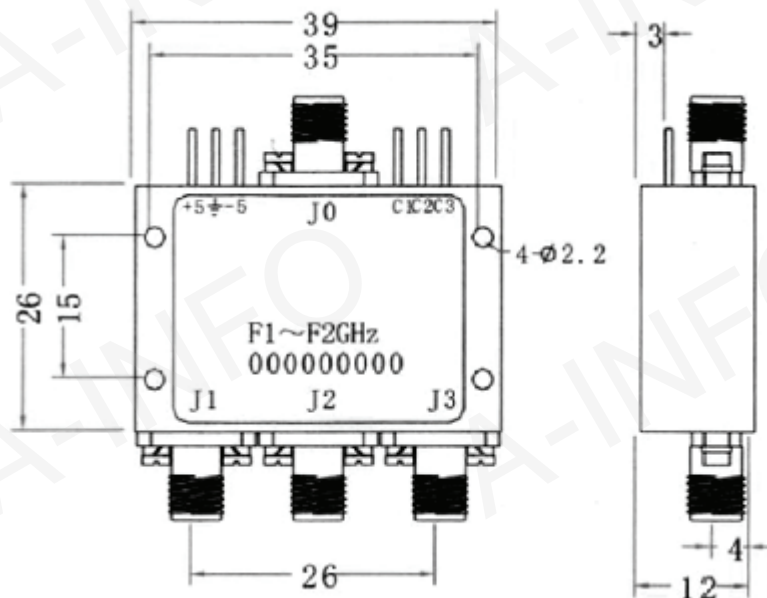

## Technical Specification

Frequency Range(GHz)	8-12
Insertion Loss(dB)	2.1 max
Isolation(dB)	60 min
VSWR	1.7 max
Switching Speed(ns)	50 max
Power Handling(W)	0.2 max
Power Supply(V)	+/-5
Control	TTL, "0" on, "1" off
Connector	SMA-Female
Net Weight(Kg)	0.04 Around

## Test Results

Port	Control C3C2C1	Frequency (GHz)	Insertion Loss(dB)		VSWR		Isolation(dB)
			min	max	min	max	min
J0-J1	110	8-12	1.46	1.85	1.15	1.27	70
J0-J2	101	8-12	1.37	1.66	1.09	1.34	72
J0-J3	011	8-12	1.38	1.68	1.02	1.26	70