


Outline Drawing (Size: mm)

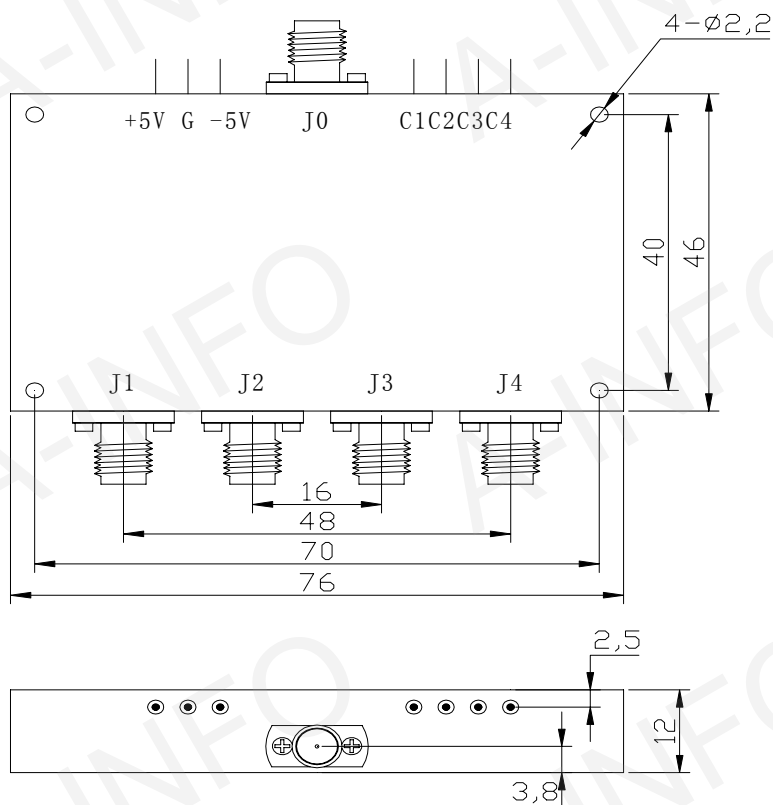

Technical Specification

Item	Technical Specification
Frequency(MHz)	800-2200
Insertion Loss(dB)	2.5 max
VSWR	1.5 max
Isolation(dB)	70 min
Switching Speed(us)	5-10
Input Power(W)	1
Connectors	SMA-Female
Operating Temperature(°C)	-55 ~ +85

Test Result Table

Port	Insertion Loss (dB)	Isolation (dB)	VSWR
J0-J1	1.66	77	1.33
J0-J2	1.60	76	1.36
J0-J3	1.60	76	1.37
J0-J4	1.64	75	1.38