


## Outline Drawing (Size: mm)

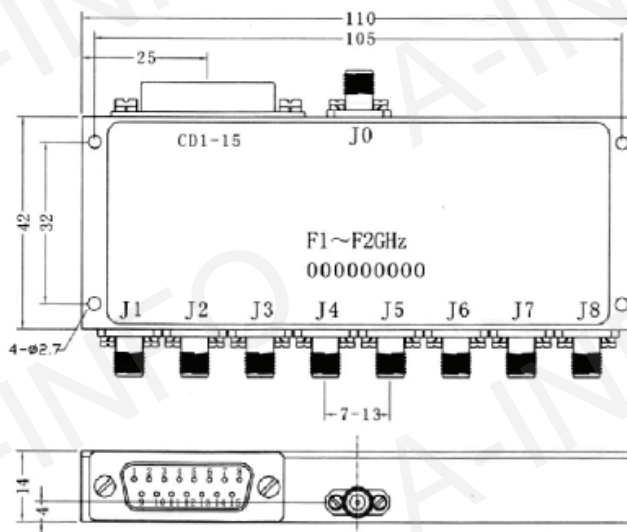

## Technical Specification

Item	Technical Specification
Frequency Range(GHz)	0.6-2.5
Insertion Loss(dB)	2.5 min
Isolation(dB)	60 max
VSWR	2.5 max
Switching Speed(ns)	100 max
Power Handling(W)	0.1
Voltage(V)	±5
Control	TTL & COMS
Connectors	SMA-Female
Operating Temperature(°C)	-40 ~ +80

## Test Results

Port	Insertion Loss(dB)	VSWR	Isolation(dB)
J0-J1	1.75	1.25	72
J0-J2	1.74	1.23	74
J0-J3	1.74	1.45	71
J0-J4	1.68	1.49	71
J0-J5	1.71	1.50	72
J0-J6	2.00	1.49	70
J0-J7	1.79	1.48	70
J0-J8	1.79	1.20	72