




Test report is for reference only.


**TEST REPORT**  
**for**  
**JXWBLA-T-1-150-20**

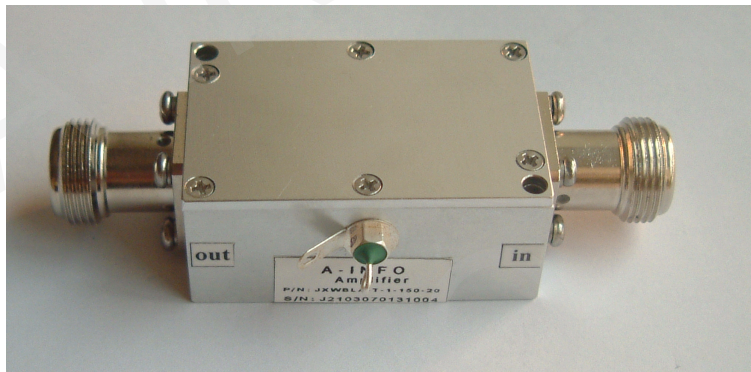

## Technical Specification

<b>Frequency Range(MHz)</b>	1-150
<b>Gain(dB)</b>	20 (Fixed)
<b>Pout@1dB(dBm)</b>	+10
<b>Noise Figure(dB)</b>	10 Typ.
<b>IP3(dBm)</b>	+20
<b>Input VSWR</b>	2:1 Typ.
<b>Output VSWR</b>	2:1 Typ.
<b>Power Supply(V)</b>	15 DC
<b>Connector</b>	N-Female
<b>Operating Temperature(°C)</b>	-20 ~ +80
<b>Storage Temperature(°C)</b>	-55 ~ +85

## Outline Drawing (Size: mm)

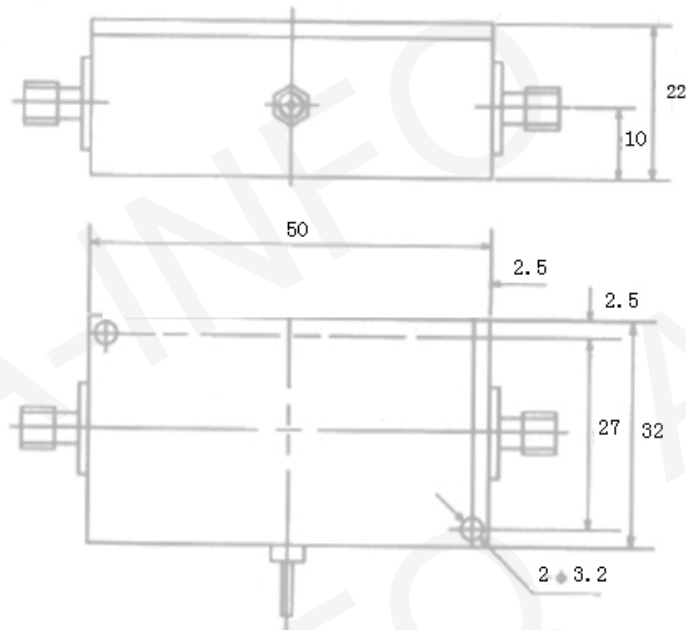

### Test Results

#### Gain & VSWR

24 Jan 2007 14:57:37

CH1 S11 LOG 10 dB/REF 0 dB  
 CH2 S21 LOG 10 dB/REF 0 dB  
 CH4 S22 LOG 10 dB/REF 0 dB

5: -28.586 dB  
 5: 22.575 dB  
 5: -40.045 dB  
 75.000 000 MHz

