



Technical Specification

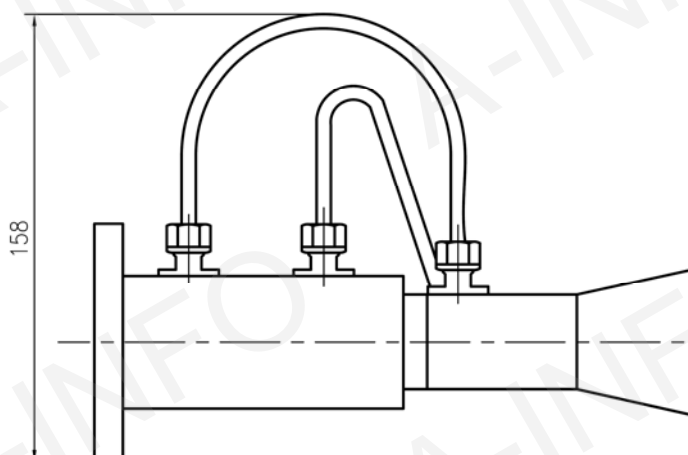


Frequency Range(GHz)	18-40
Gain(dBic)	13 Typ.
Axial Ratio(dB)	2.0 Typ. (L)
	2.0 Typ. (R)
	5.0 Max (L)
	6.0 Max (R)
3dB Beamwidth(deg)	50-18
Polarization	Dual Circular
VSWR	2.0 Max.
Connector	2.92mm-Female
Net Weight(Kg)	0.38 Around
Size(mm)	127 x 116 x 158 Approx.

Outline Drawing (Size: mm)

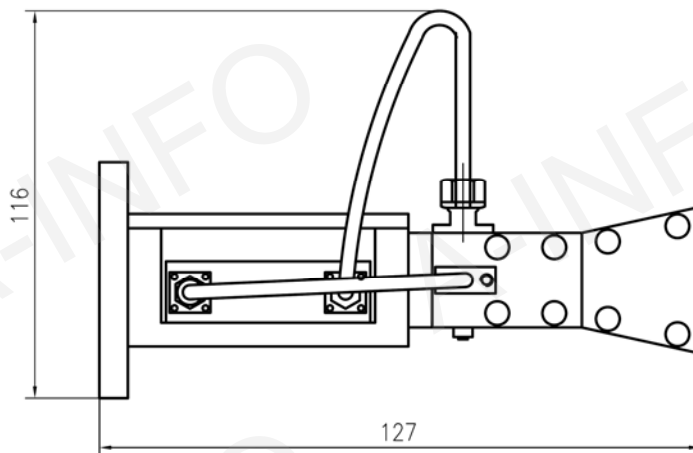


Test Results


1. Gain

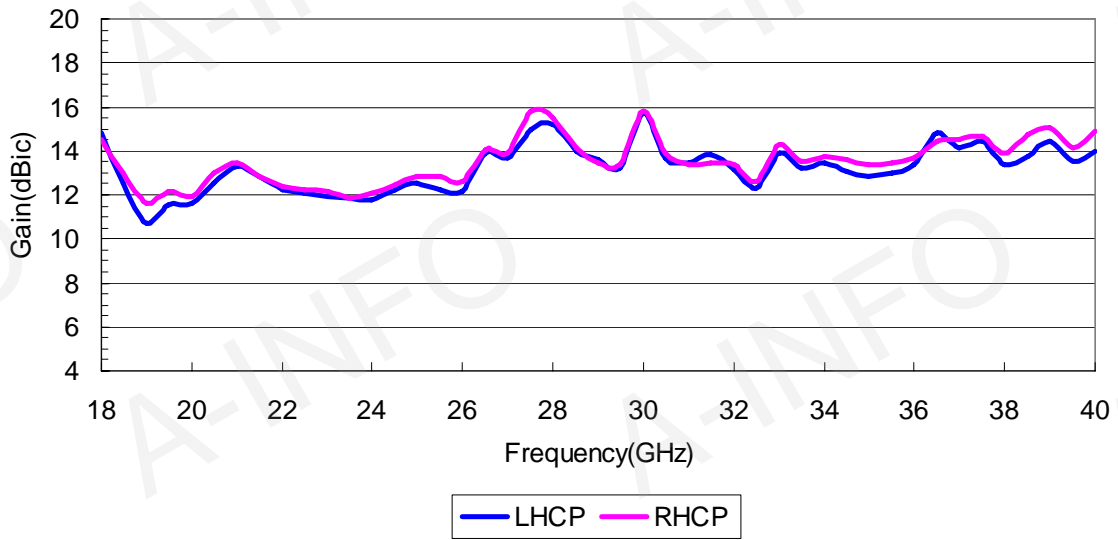


2. Axial Ratio

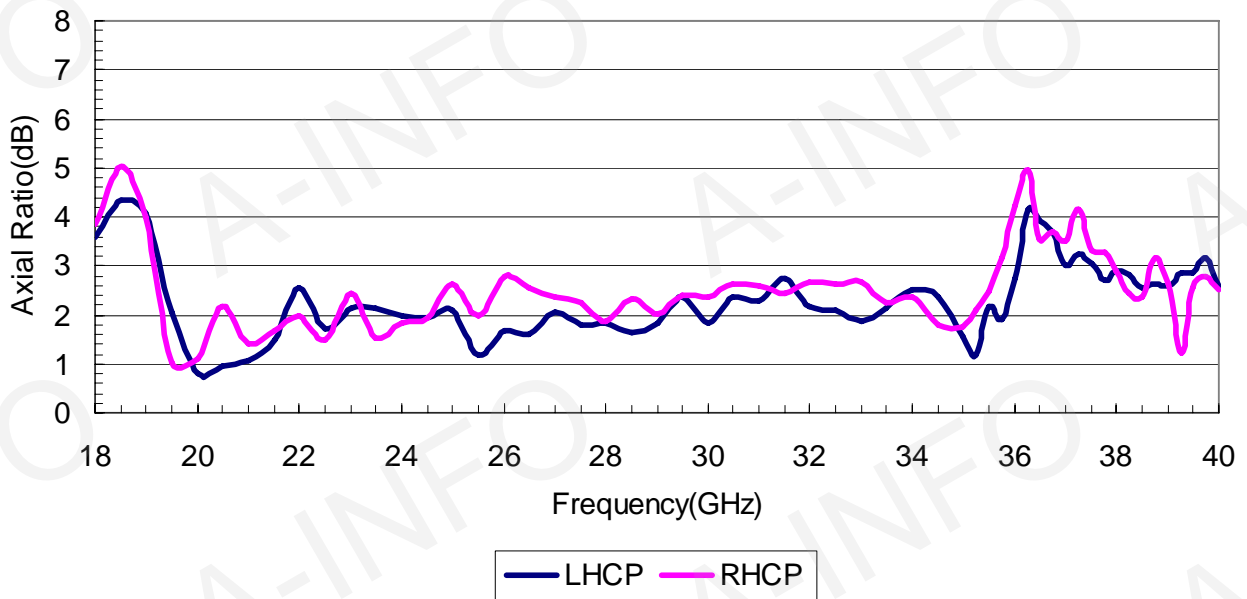


3. VSWR LHCP



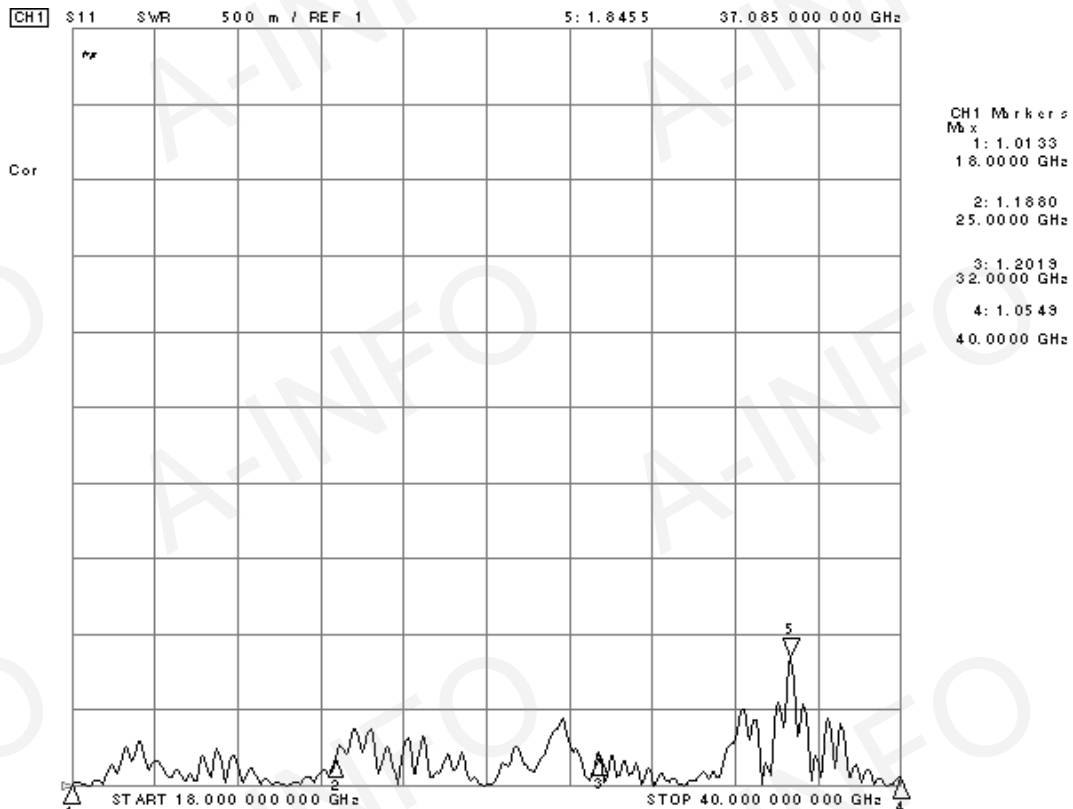



RHCP



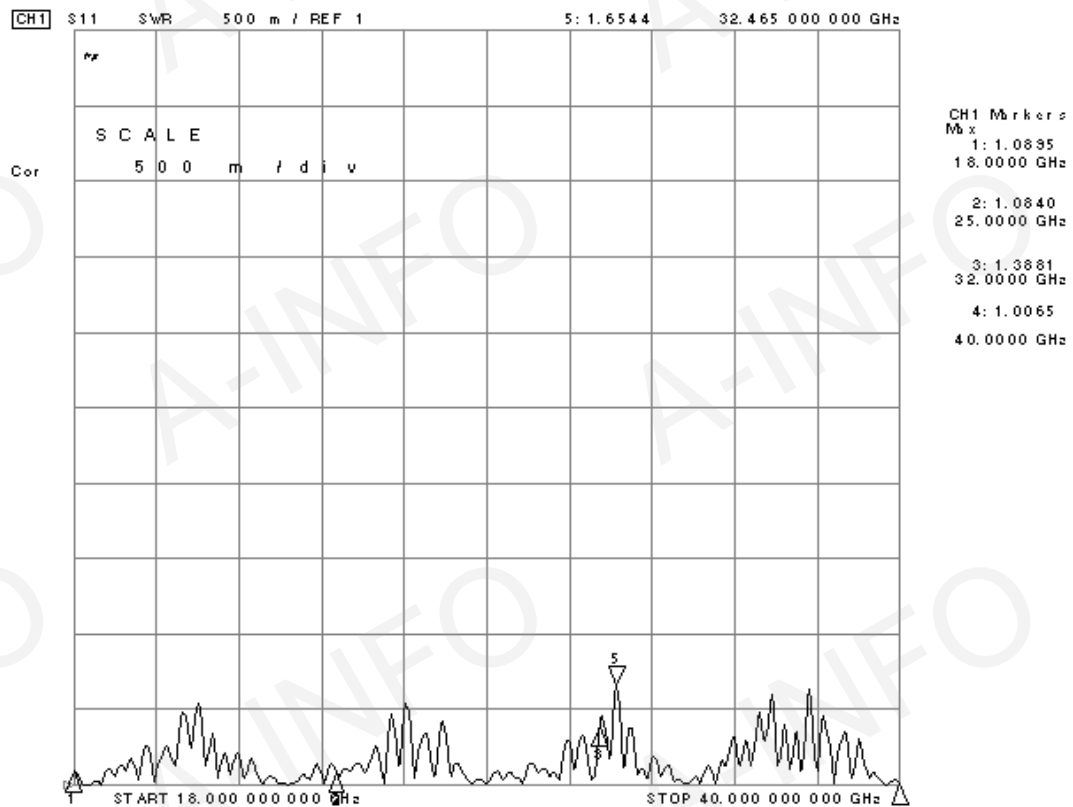





4. Pattern(LHCP)

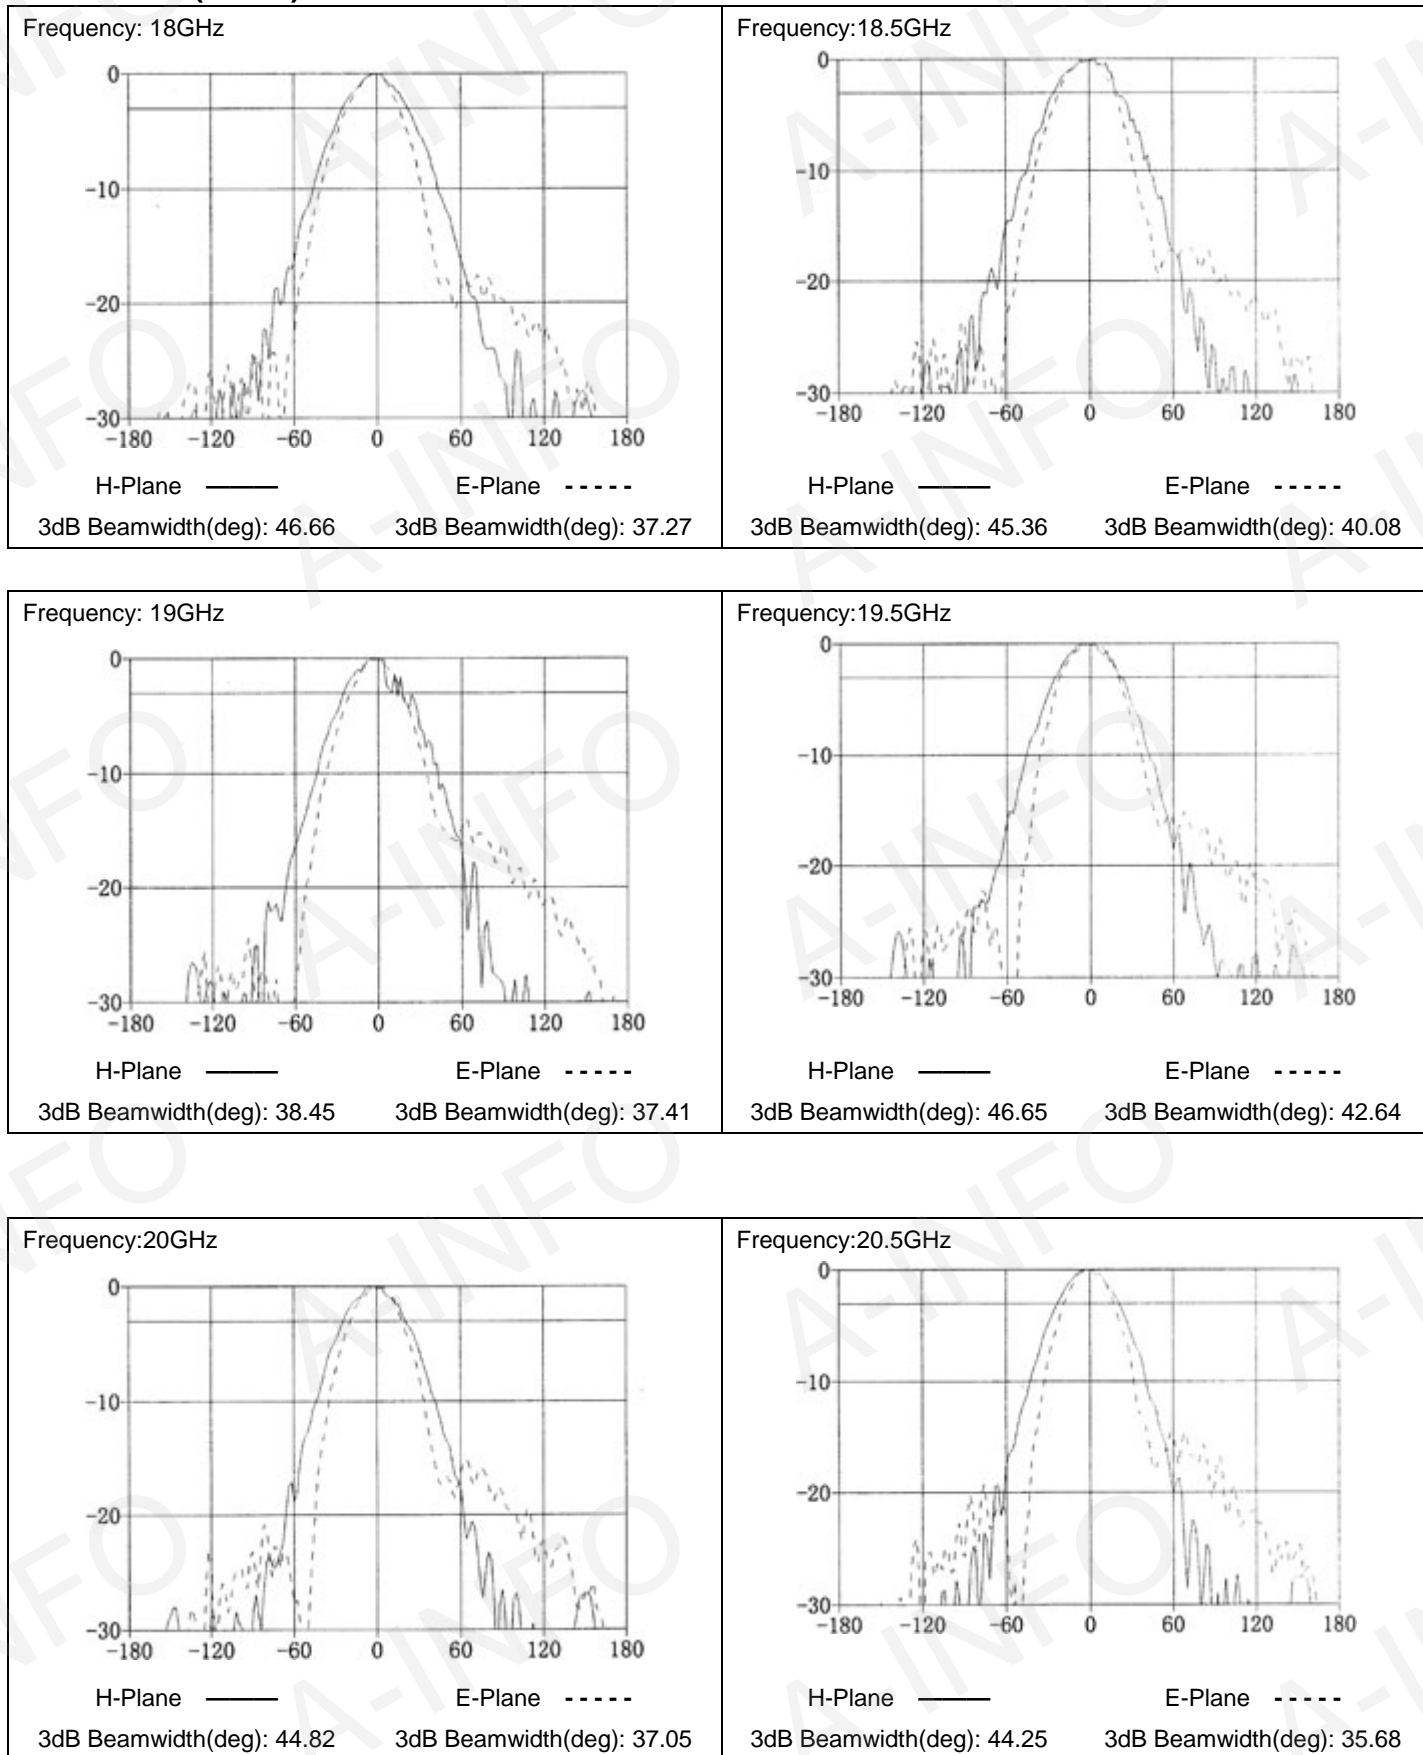


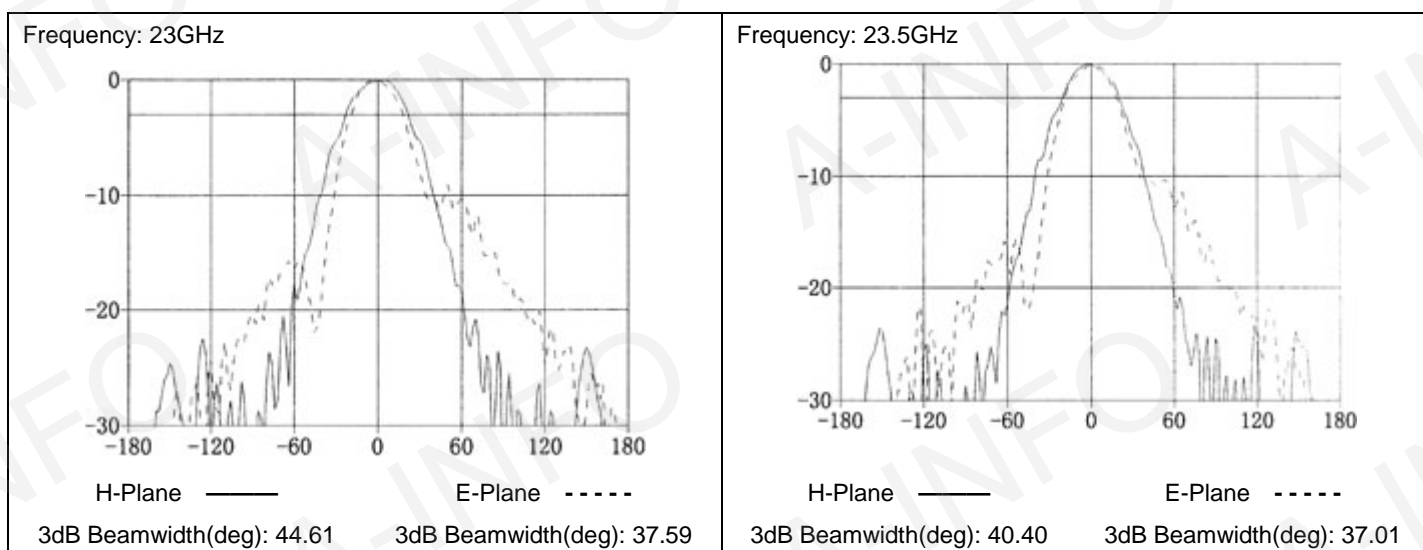
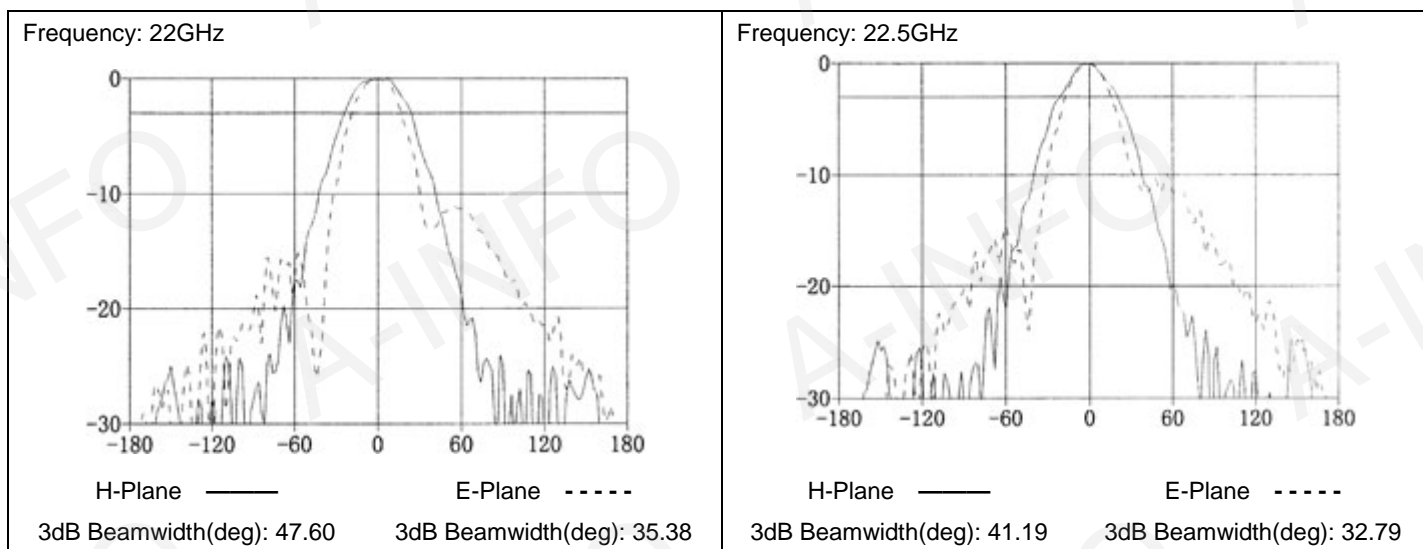
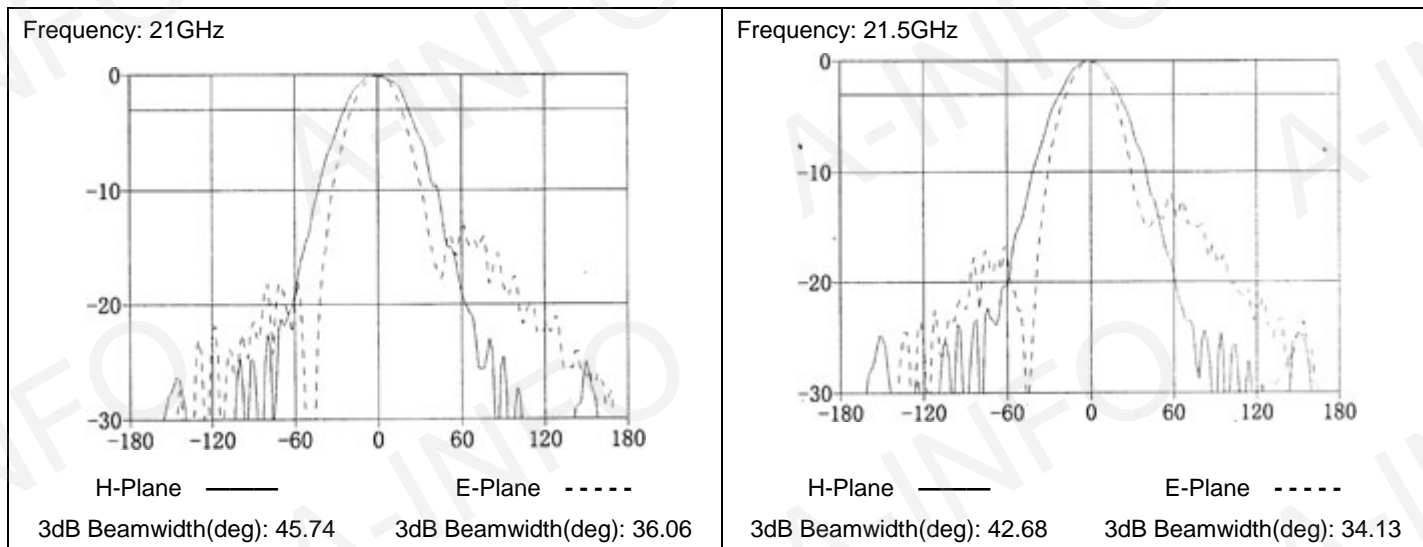



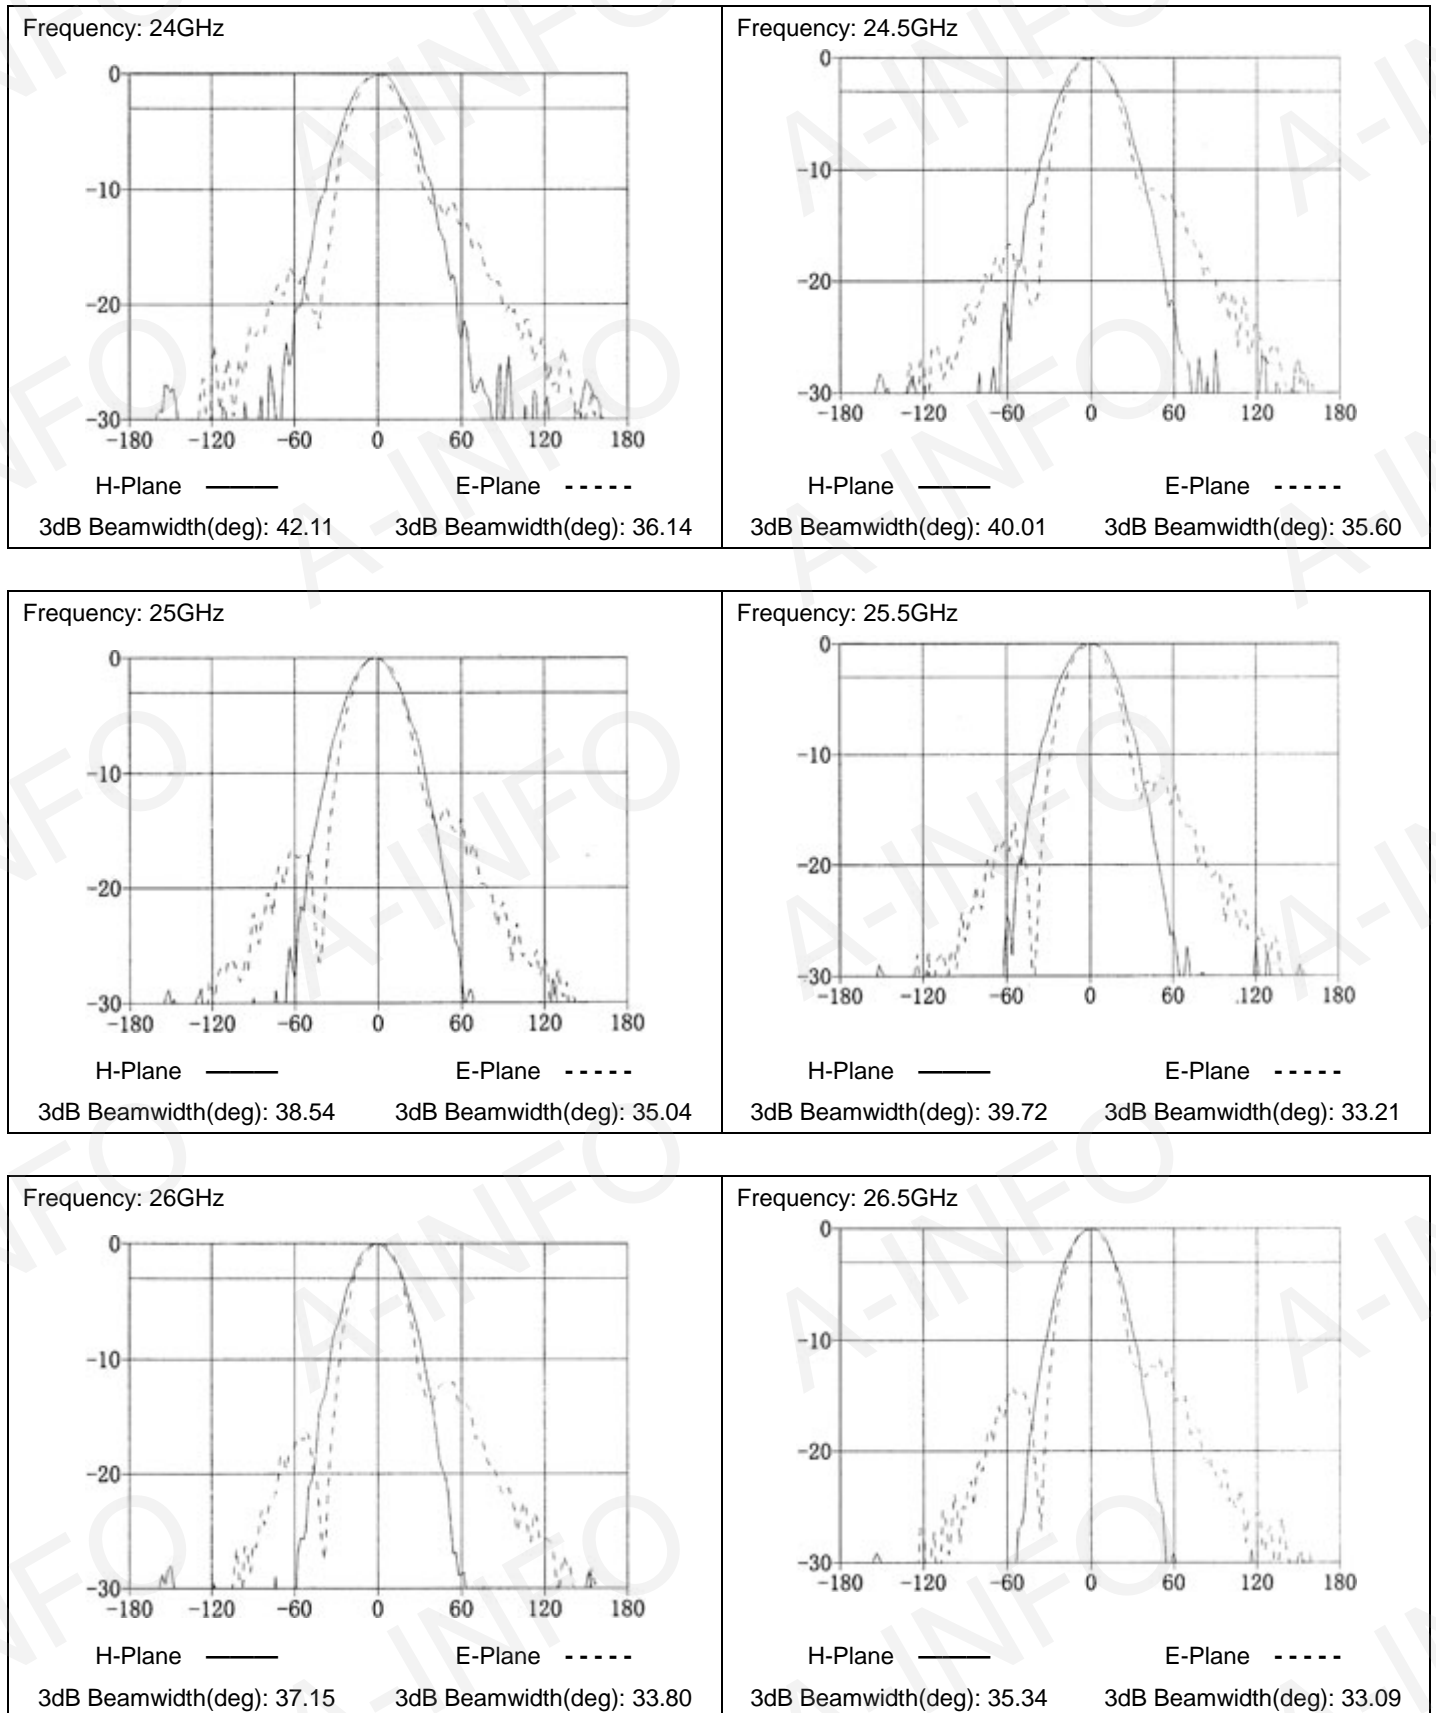


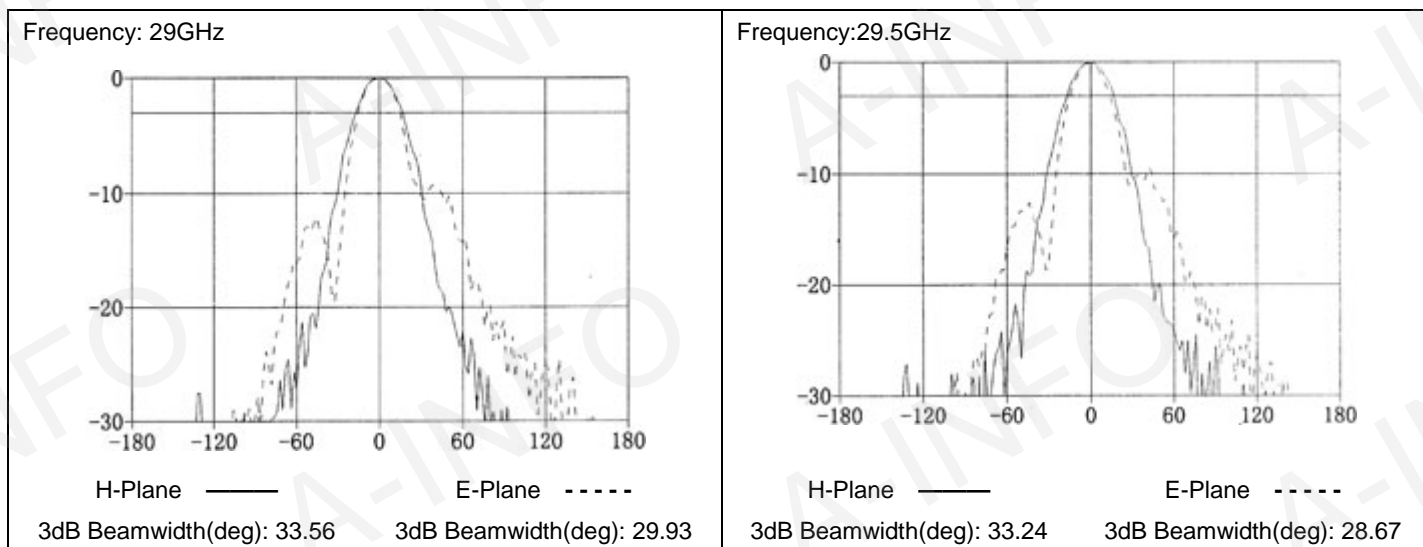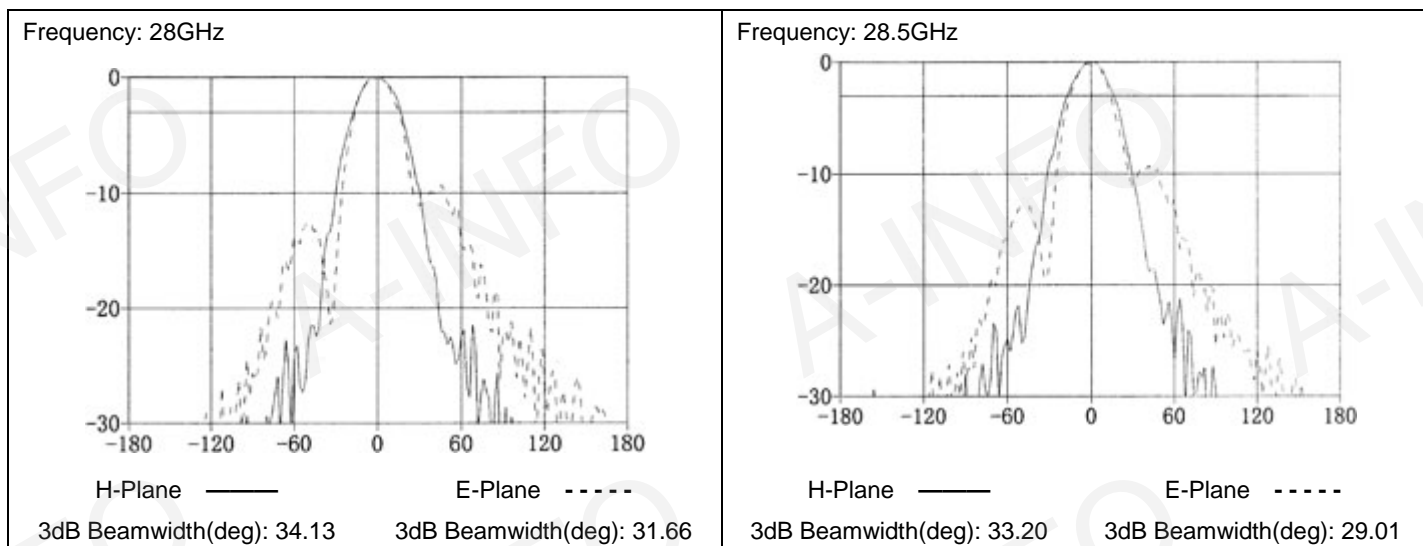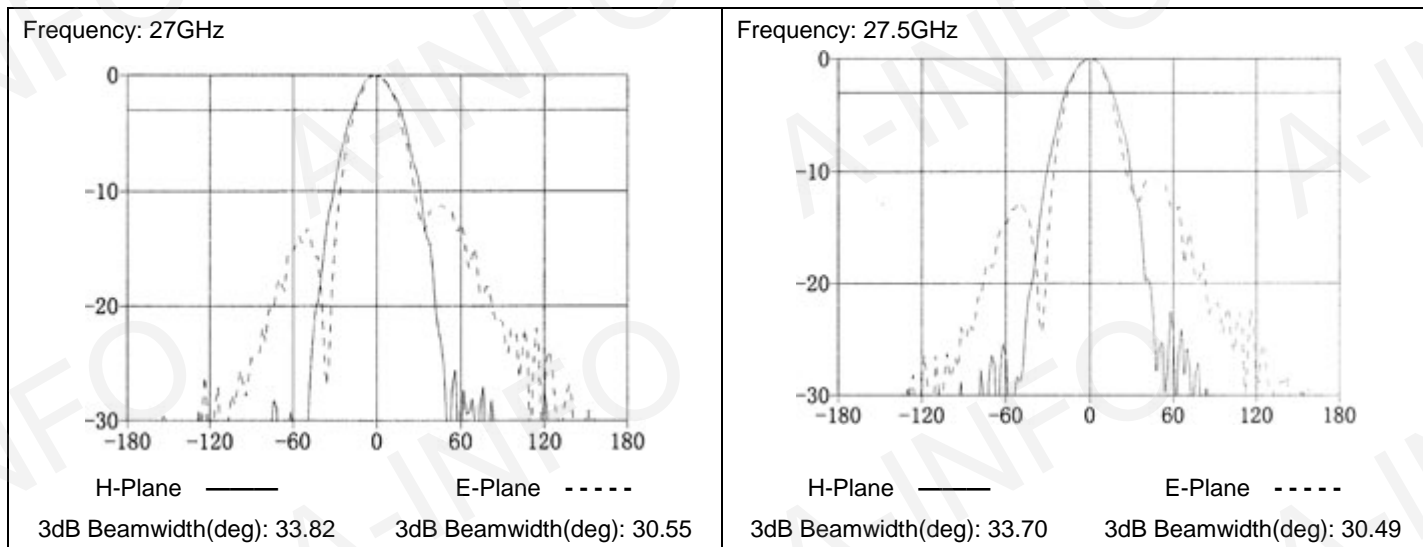

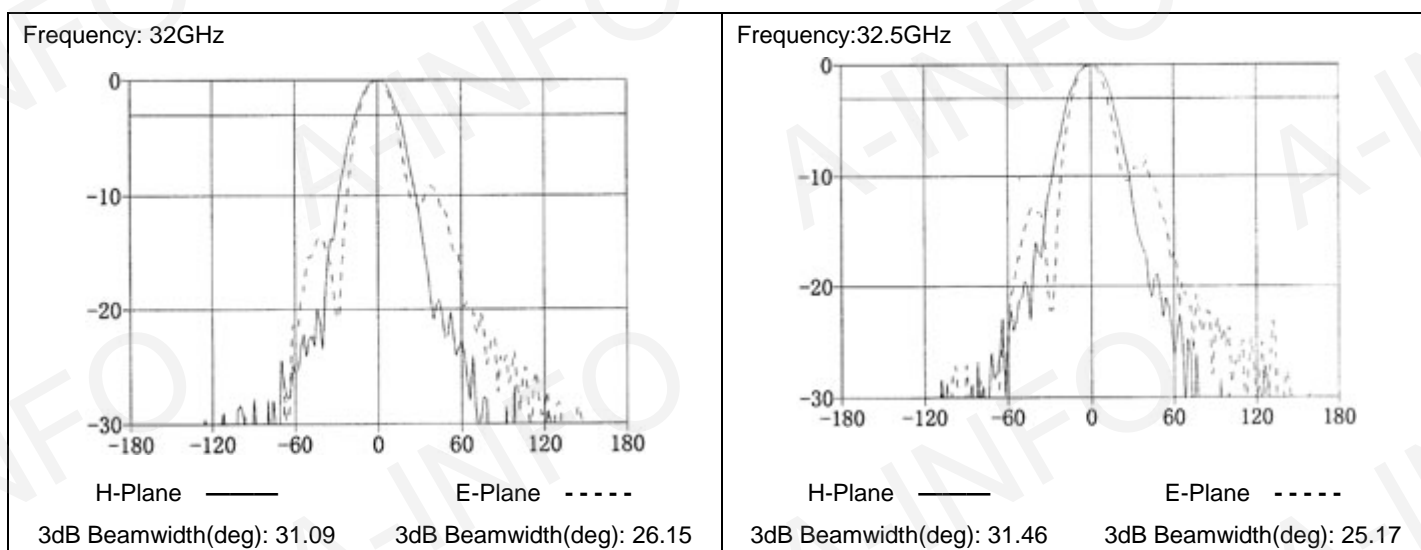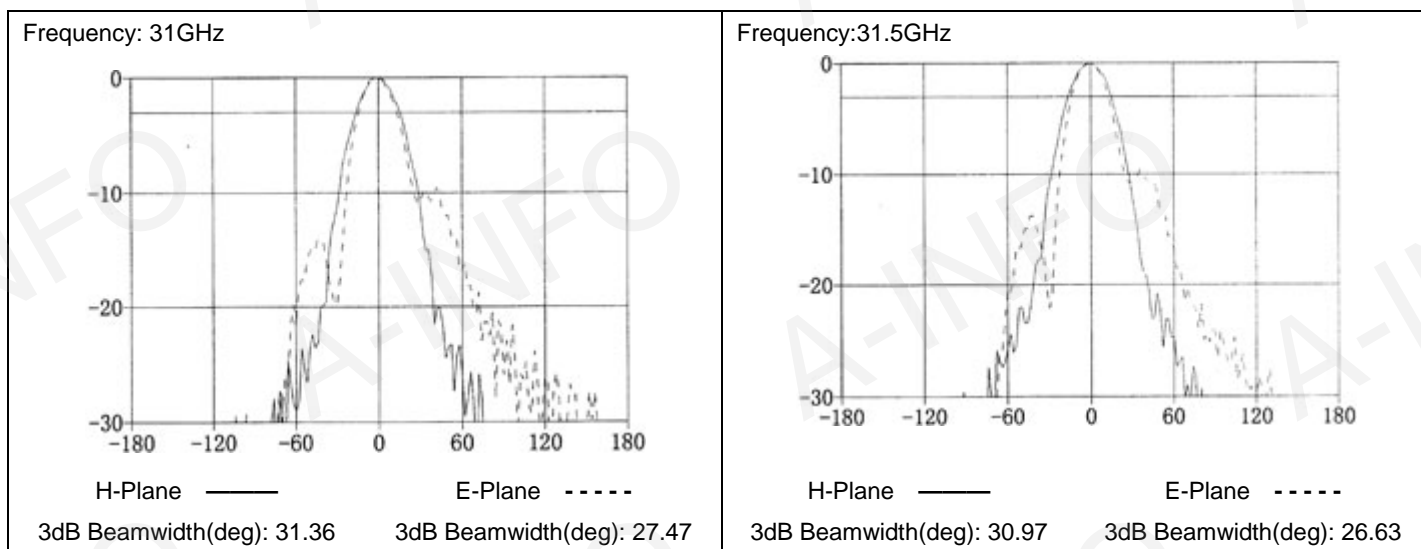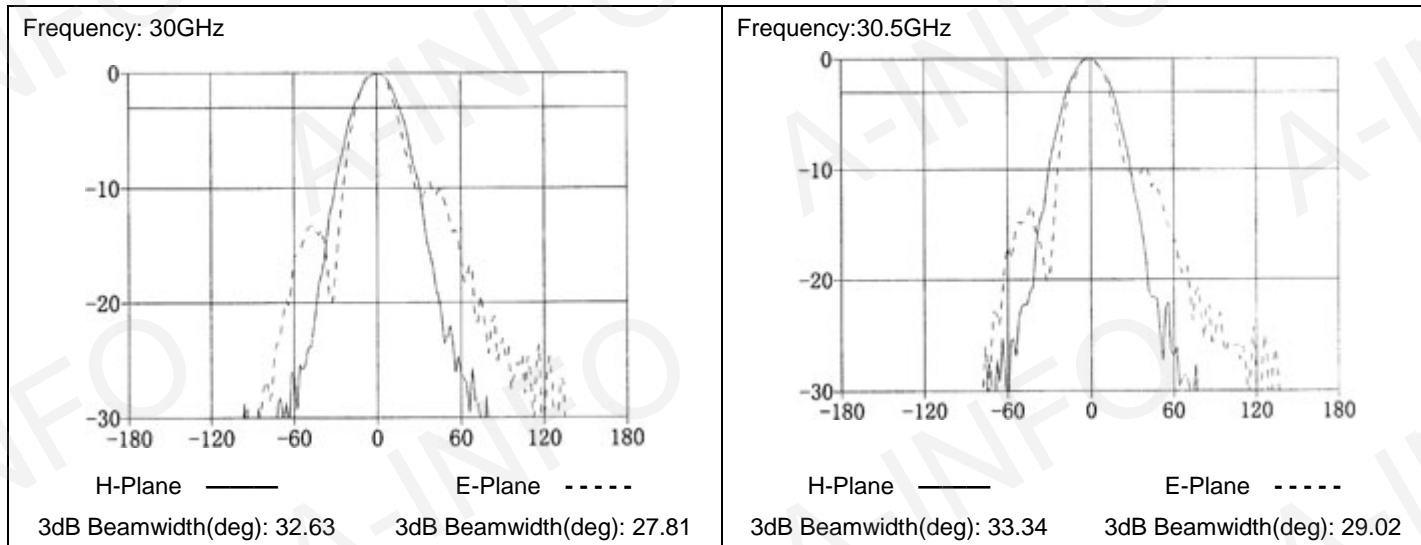

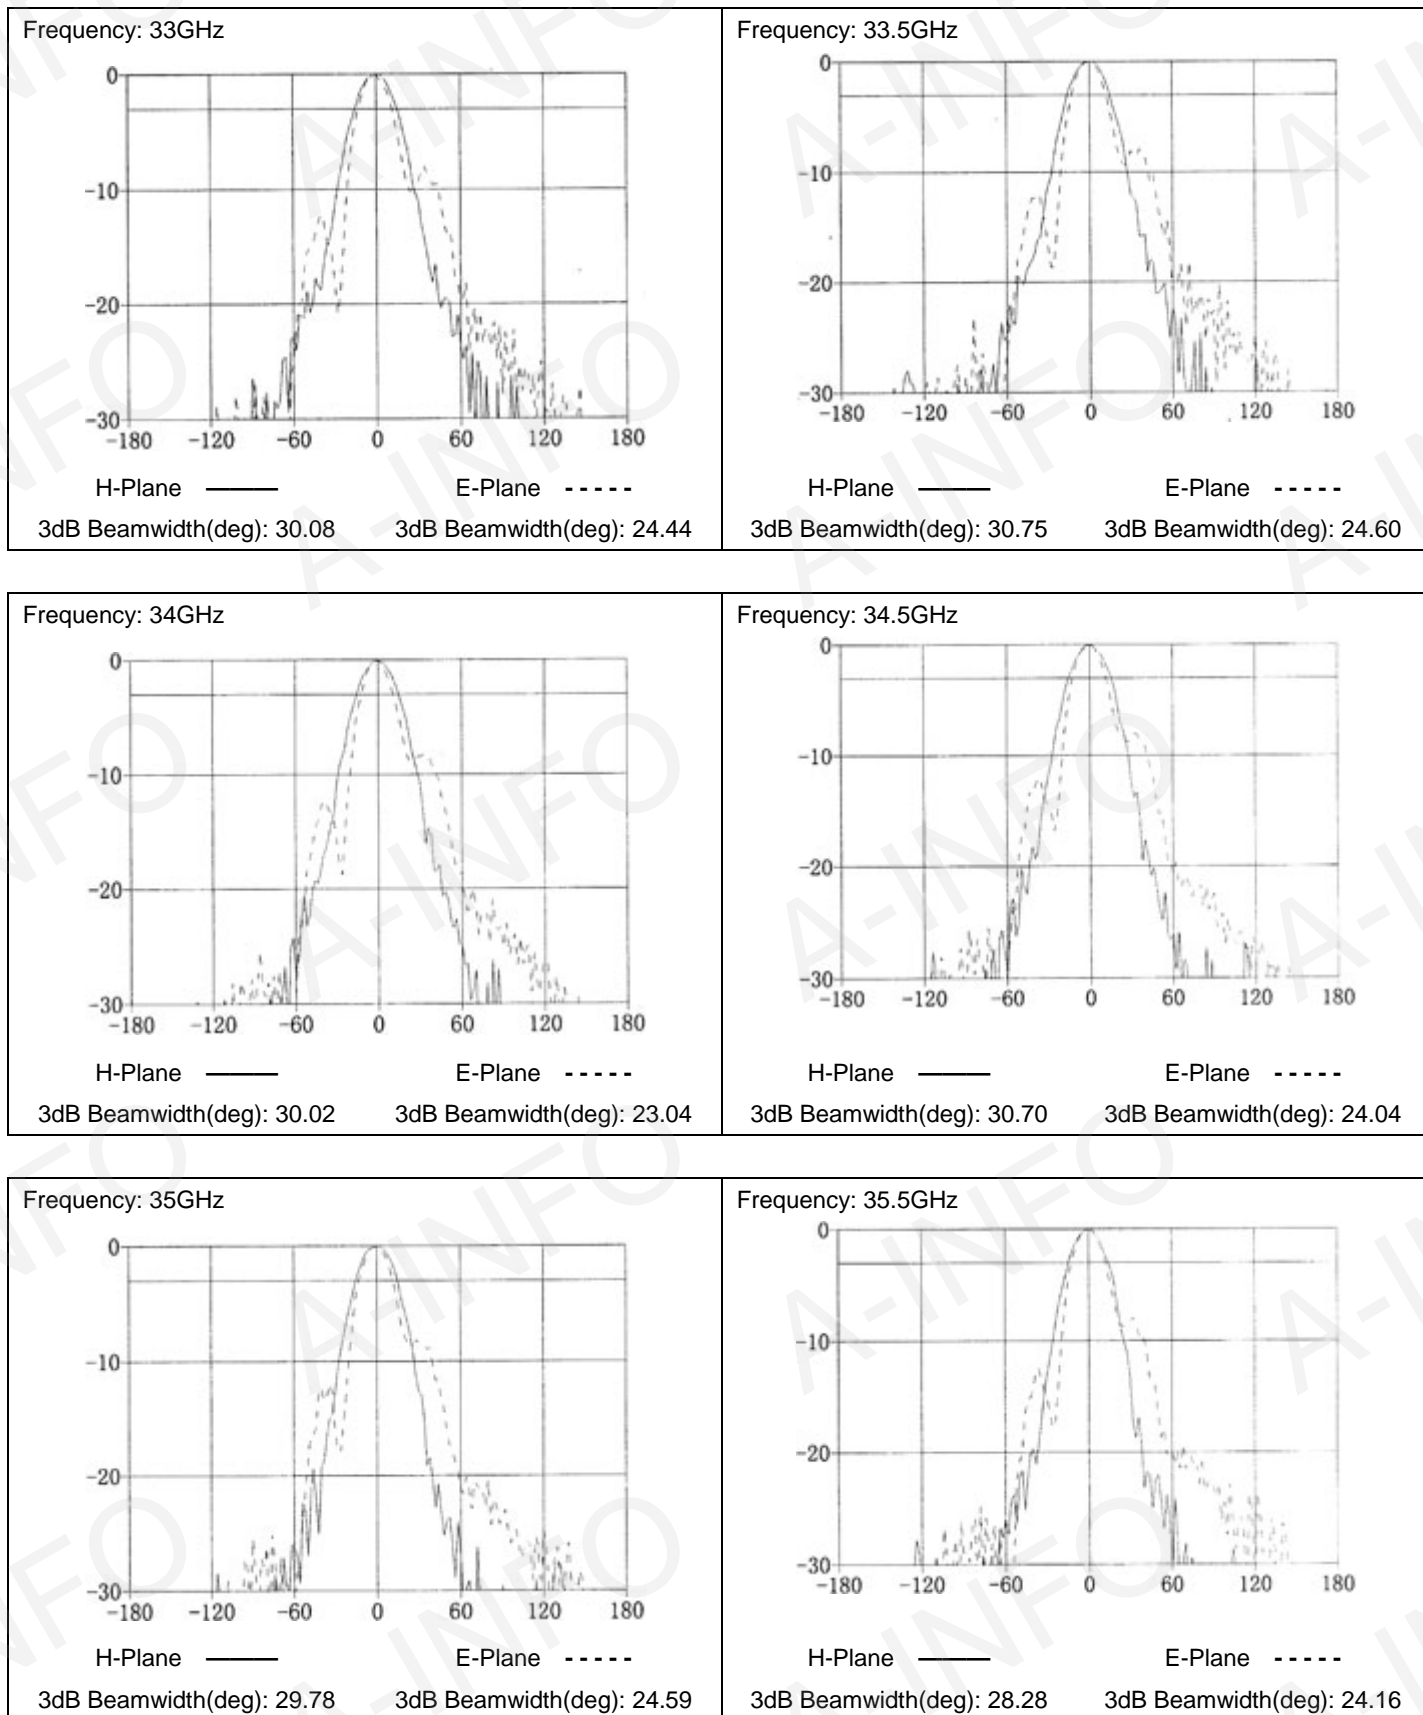

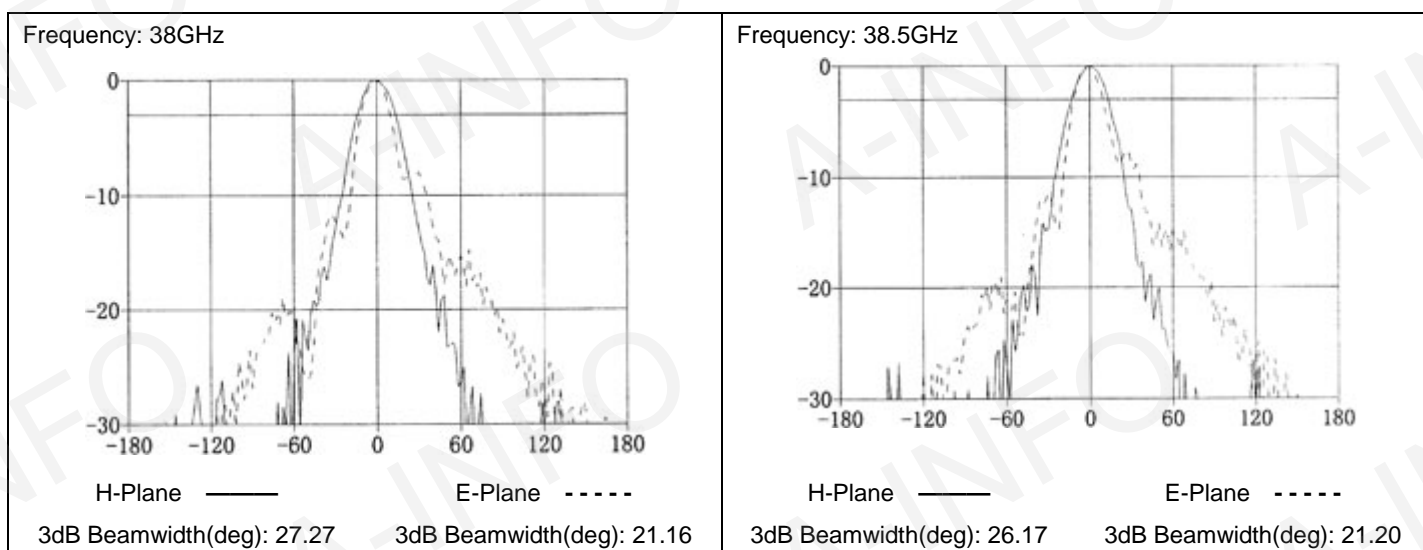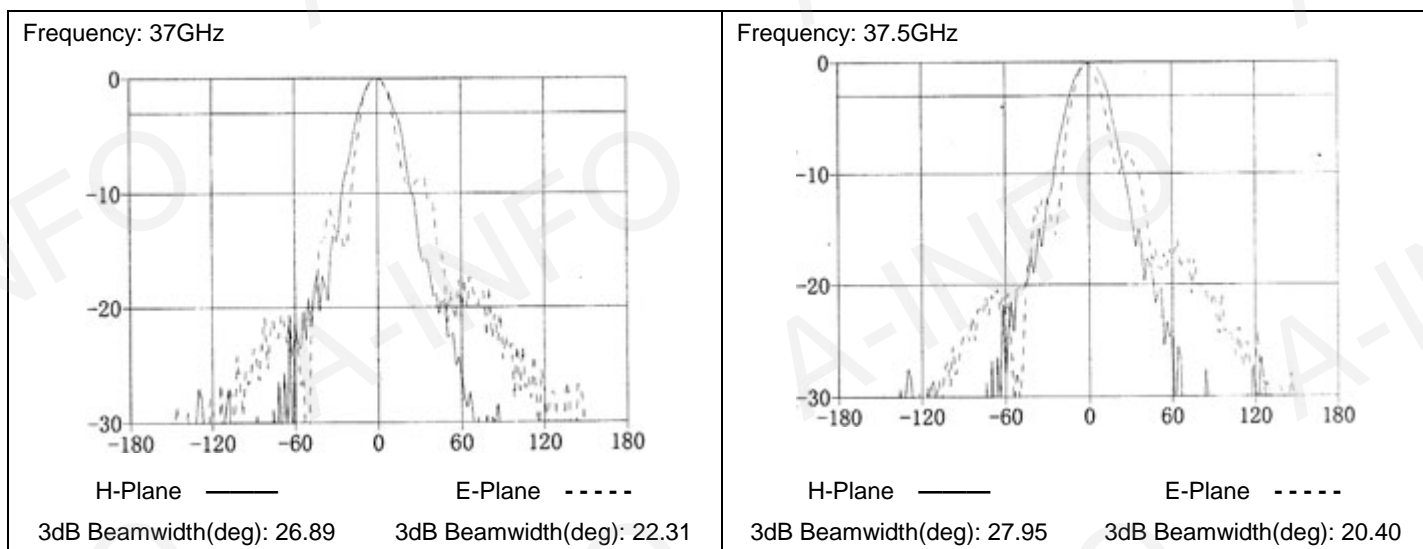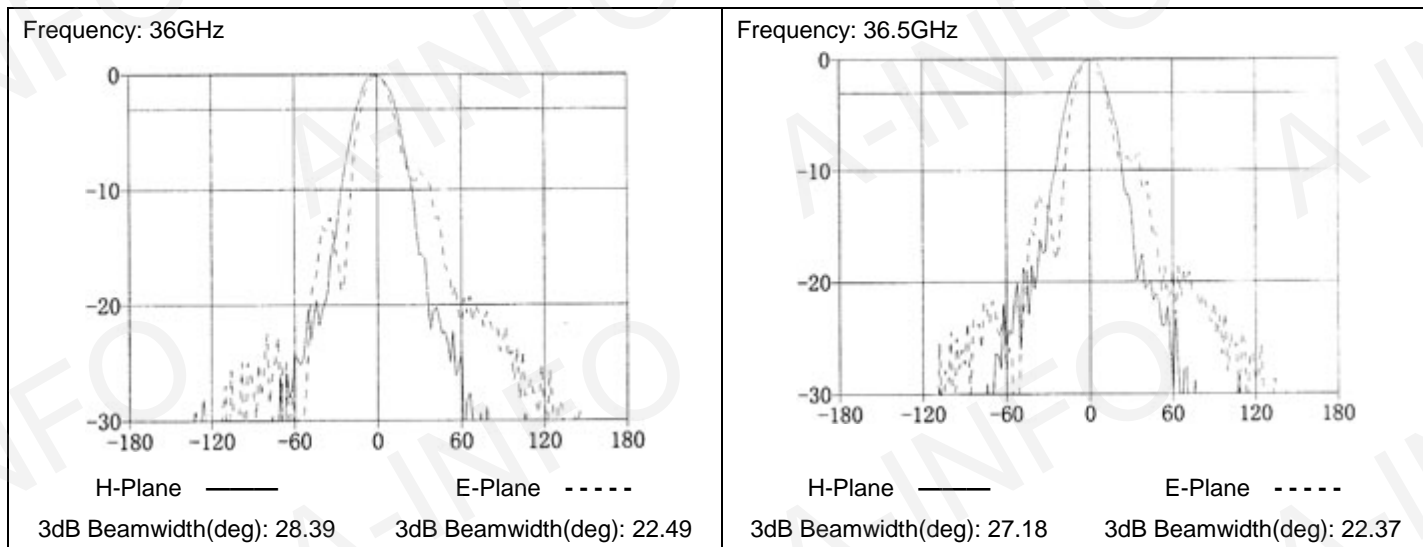

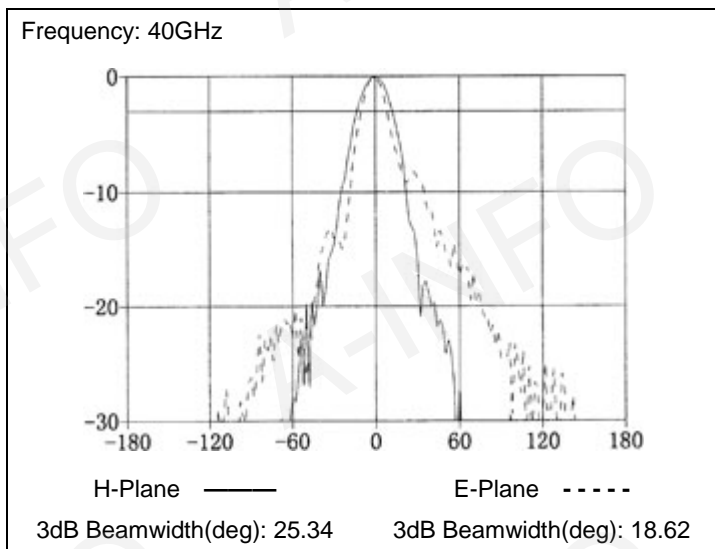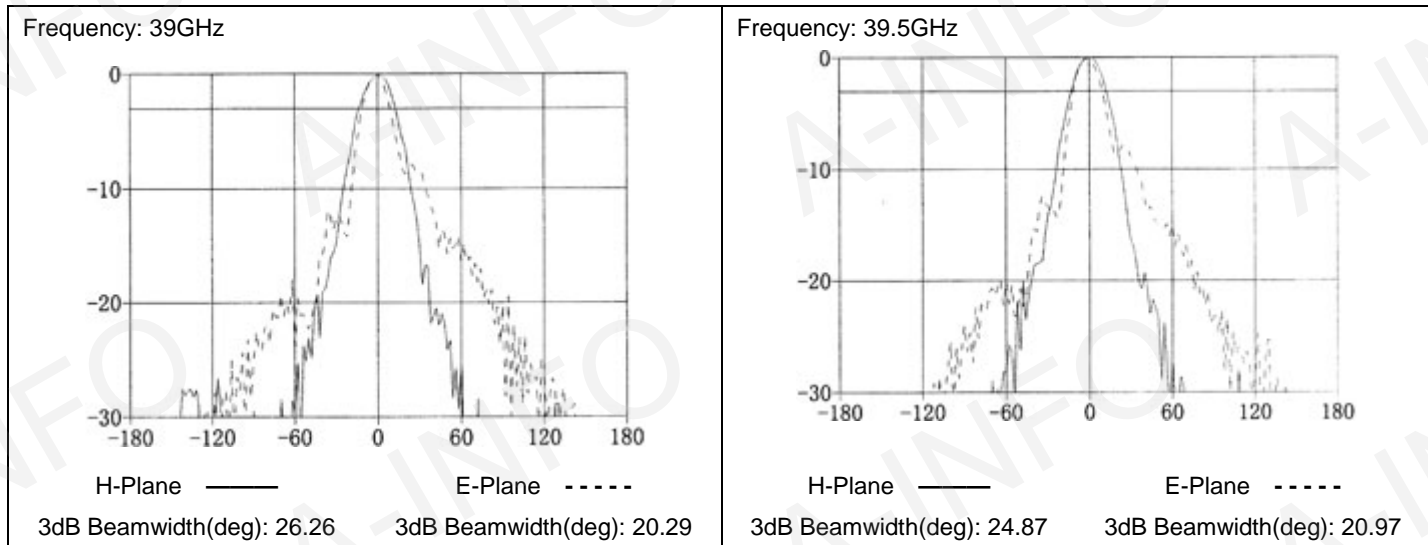

RHCP

