


Technical Specification

Frequency Range(GHz)	0.5-2
Insertion Loss(dB)	0.9 max
Coupling(dB)	10
Coupling Flatness(dB)	+/-0.8 max
Frequency Sensitivity(dB)	+/-0.7 max
Directivity()	20 min
VSWR	1.25 max
Power Handling(W)	50
Connector	N-Female
RoHS	Yes
Net Weight(Kg)	0.29 Around

Test Results

Isolation, Coupling, VSWR

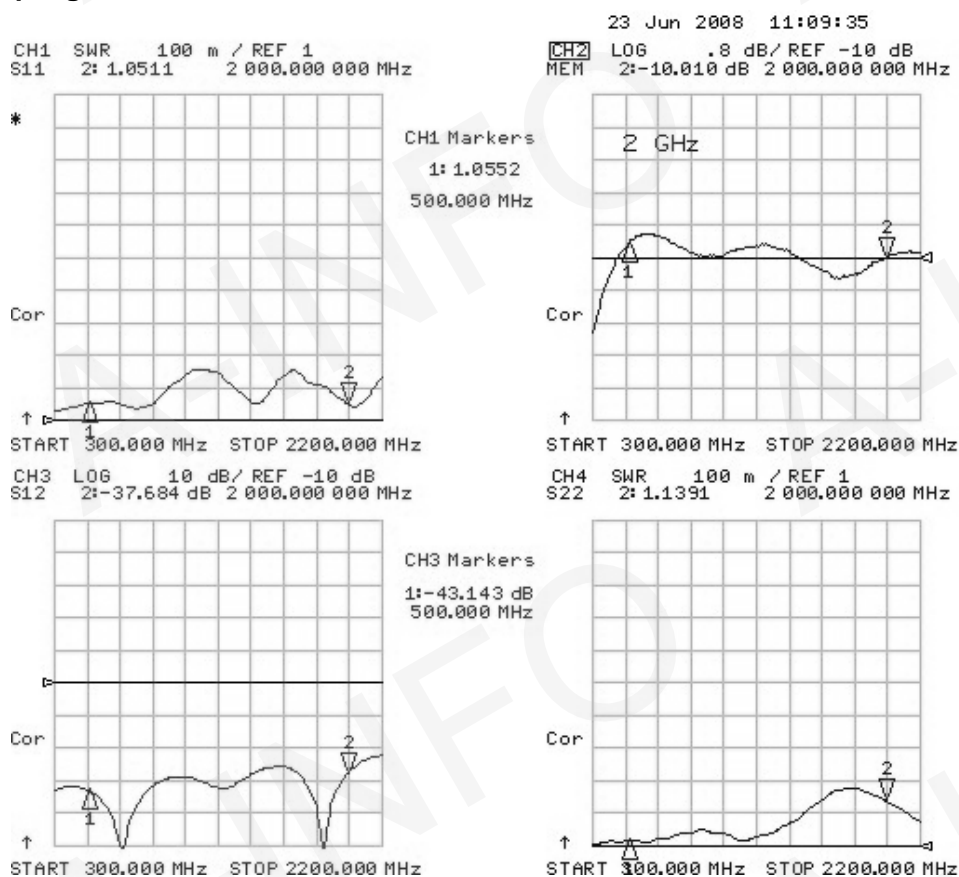

Insertion Loss, VSWR

