


## Outline Drawing (Size: mm)

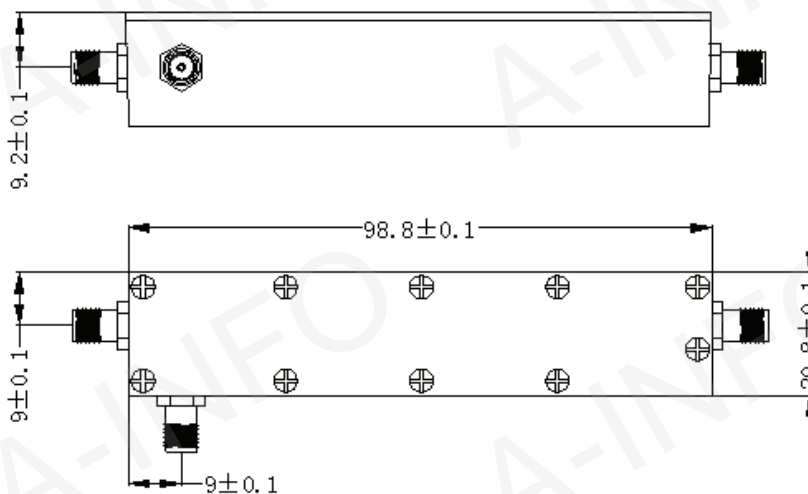

## Test Result Table

Item	Technical Specification	Test Results
Frequency Range(GHz)	0.8-2.5	0.8-2.5
Coupling(dB)	6±1	6±0.4
Directivity(dB)	20 min	21 min
Insertion Loss(dB)	0.5 max	0.46 max
VSWR	1.2 max	1.16 max
Power Handling(W)	50	50
Impedance(Ohms)	50	50
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-55 ~ +85	-55 ~ +85