



Test report is for reference only.


**TEST REPORT**  
**For**  
**JXWBLB-T-BP-10150-300-6CS**



### Technical Specification

1dB Pass Band(MHz)	10000-10300
Insertion Loss @ Center Frequency(dB)	1.0 max
Rejection(dB)	40 min@10640MHz
	55 min@9360MHz
VSWR	1.5 max
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +80
Storage Temperature(°C)	-55 ~ +85
Surface Finish	Silver
Net Weight(Kg)	0.02 Around

### Outline Drawing (Size: mm)

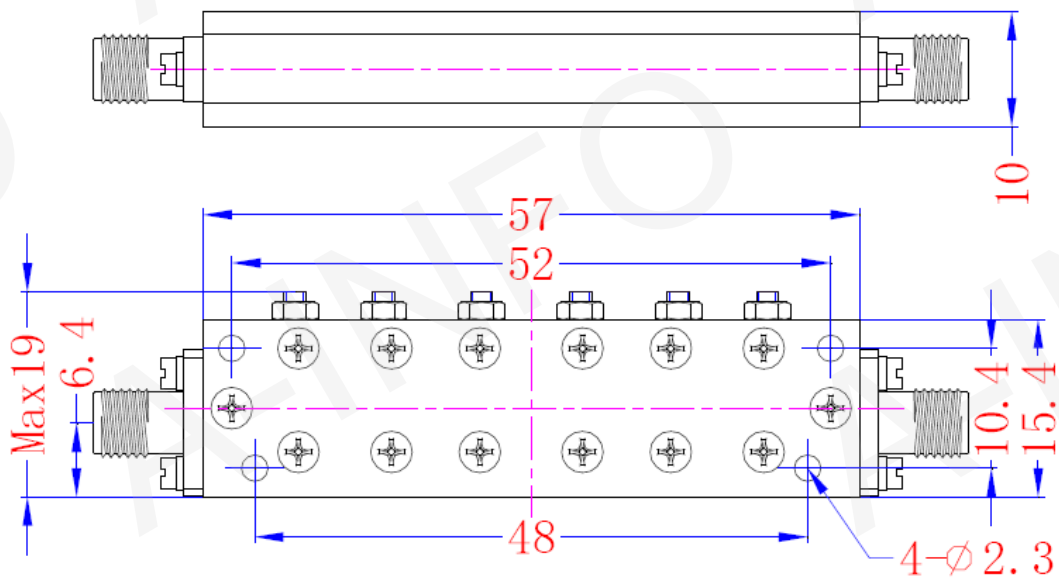

### Test Results

I.L. @ Center Freq. (dB)	Rejection(dB)		VSWR
	10640MHz	9360MHz	
0.67	59.2	84.7	1.28