




Test report is for reference only.

TEST REPORT
For
JXWBLB-T-BP-12395-610-6CS

Technical Specification

Frequency Range(MHz)	12090 – 12700
Center Frequency (f0)(MHz)	12395
Insertion Loss (dB)	1.5 max
VSWR	1.5 max
Poles	6
Rejection(dB@ MHz)	30 min @ f0±605
Power Handling(W)	10
Connectors	SMA-Female
Operating Temperature(°C)	-30 ~ +70
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.045

Outline Drawing (Unit: mm)

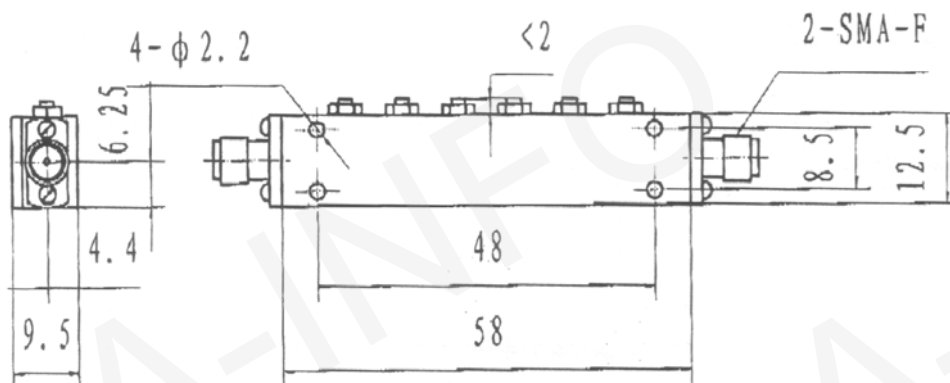

Test Results

Temperature	Insertion Loss (dB)			Rejection(dB)		VSWR
	12395MHz	12090MHz	12700MHz	11790MHz	13000MHz	
Low Temperature	-0.35	-0.65	-0.62	-37.3	-36.5	1.40
High Temperature	-0.51	-0.73	-0.92	-35.1	-38.9	1.41
Normal Temperature	-0.41	-0.68	-0.74	-36.2	-37.7	1.40