



Test report is for reference only.


TEST REPORT
For
JXWBLB-T-BP-1250-1500-LS



Technical Specification

Frequency Range (GHz)	0.5-2.0
Insertion Loss(dB)	1.5 max (at center frequency)
Rejection(dB @GHz)	60 min@0.4
	60 min@2.4
Power Handling(W)	1 CW
VSWR	2.0 max
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +85
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.015

Outline Drawing (Size: mm)

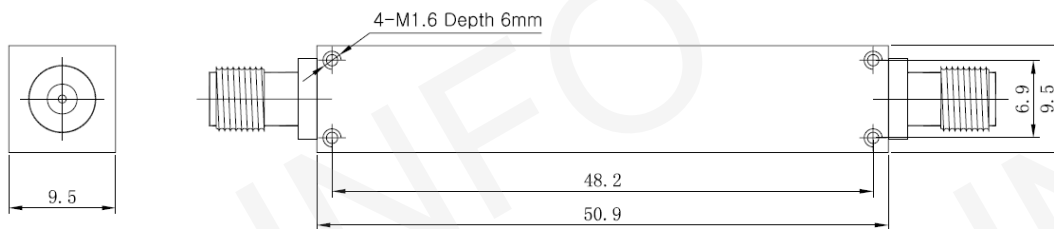

Test Results

Temperature	F0 (MHz)	Lr0 (dB)	-1dB BW (MHz)	Rejection(dB)		VSWR
				0.4GHz	2.4GHz	
Low Temperature	1250	-0.28	1583.49	-71.2	-71.2	1.61
High Temperature	1250	-0.34	1564.78	-70.6	-72.4	1.62
Normal Temperature	1250	-0.31	1577.28	-70.5	-71.2	1.60