


Outline Drawing (Size: mm)

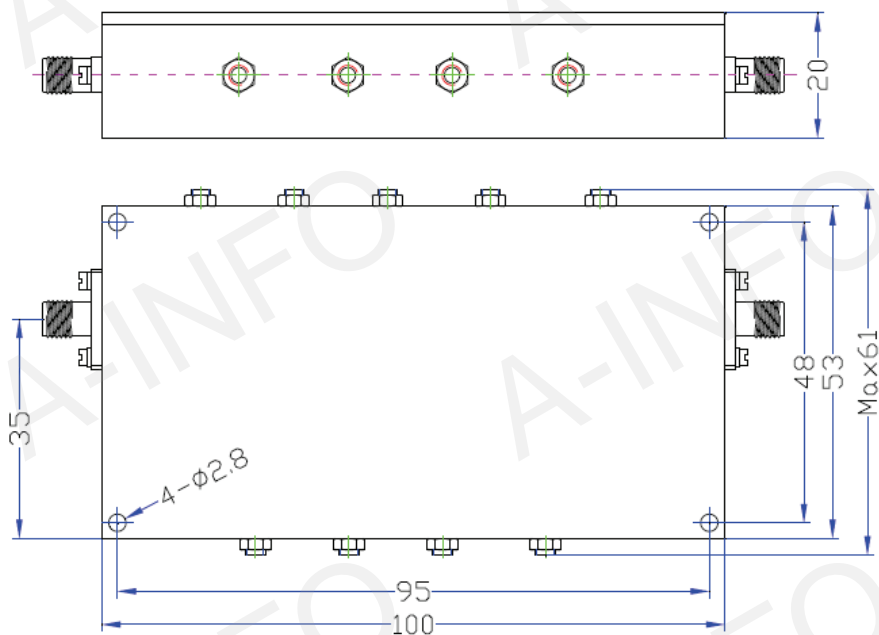

Test Result Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	1050-1750	1050-1750
Center Frequency(MHz)	1400	1400
Bandwidth(MHz)	700	700
Insertion Loss (dB)	0.8 max	0.39 max
Rejection(dB)	45 min@800MHz	54min@800MHz
	50 min@2130MHz	69 min@2130MHz
VSWR	1.5 max	1.35 max
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +80	-40 ~ +80