


Outline Drawing (Size: mm)

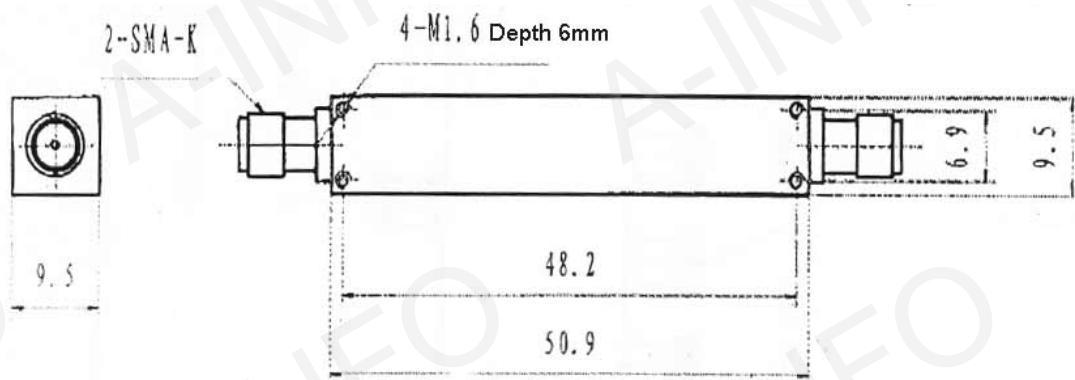

Technical Specification

Item	Technical Specification
Center Frequency(f0)(MHz)	1500
1dB Bandwidth(MHz)	1000 min
Frequency Range(MHz)	1000-2000
Insertion Loss@f0 (dB)	1.5 max
VSWR	1.5 max
Rejection(dB)	60 min@800MHz
	60 min@2200MHz
Impedance(Ohms)	50
Connectors	SMA-Female
Operating Temperature(°C)	-40 ~ +70
Storage Temperature(°C)	-55 ~ +85

Test Results

Temperature	f0 (MHz)	I.L.@f0 (dB)	1dB Bandwidth (MHz)	Rejection(dB)		VSWR
				800MHz	2200MHz	
Low	1500	0.39	1024.67	77.2	66.8	1.42
High	1500	0.43	1015.33	75.9	65.8	1.42
Normal	1500	0.41	10020.78	76.5	66.2	1.41