



Test report is for reference only.


**TEST REPORT**  
**For**  
**JXWBLB-T-BP-15000-2000-9CSMF**



## Technical Specification

Center Frequency[f <sub>0</sub> ](GHz)	15
1dB Bandwidth(GHz)	2
Insertion Loss (dB)	1.0 max
VSWR/50ohms	1.7:1 max
Rejection(dB)	40 min @ f <sub>0</sub> ±2GHz
	60 min @ f <sub>0</sub> ±3GHz
	70 min @ 1-11GHz
Input Connector	SMA-Male
Output Connector	SMA-Female
Pin(W)	1 CW min
Operating Temperature(°C)	-15~+85
Net Weight(Kg)	0.03 Around

## Outline Drawing (Size: mm)

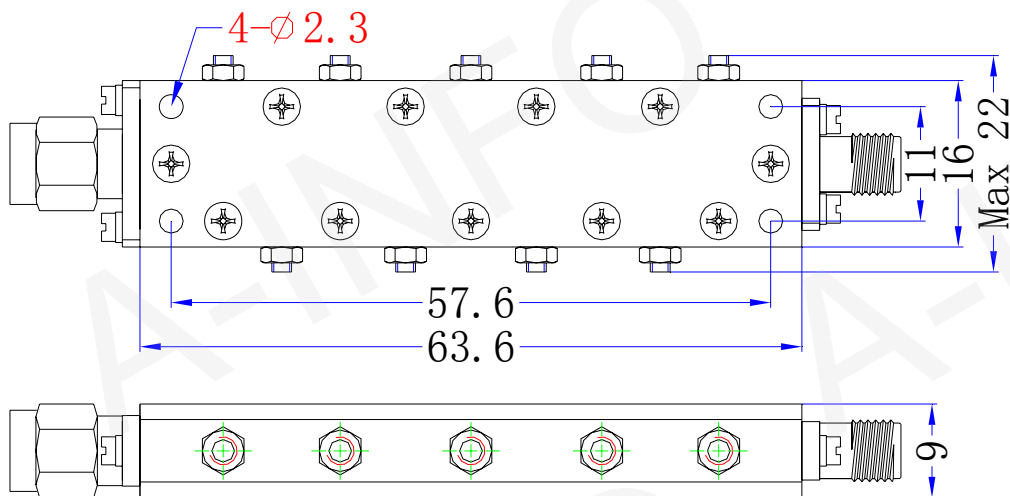

## Test Results

Frequency Range(GHz)	Insertion Loss(dB)	Rejection(dB)			VSWR
		f <sub>0</sub> ±2GHz	f <sub>0</sub> ±3GHz	1-11GHz	
14-16	0.65	66 @ f <sub>0</sub> -2GHz 67 @ f <sub>0</sub> +2GHz	90 @ f <sub>0</sub> -3GHz 90 @ f <sub>0</sub> +3GHz	91	1.65