



Test report is for reference only.


**TEST REPORT**  
**For**  
**JXWBLB-T-BP-15250-1500-10CS**



### Technical Specification

1dB Pass Band (GHz)	14.5 – 16.0
Insertion Loss @ Center Frequency (dB)	1.5 max
Rejection (dB @ GHz)	55 min @ 14 55 min @ 16.5
VSWR	1.5 max
Connectors	SMA-Female
Impedance (Ohm)	50
Size (mm)	67 x 12.5 x 8.2
Operating Temperature (°C)	-40~ +80
Storage Temperature (°C)	-55~ +85
Net Weight (Kg)	0.045 Around

### Outline Drawing (Size: mm)

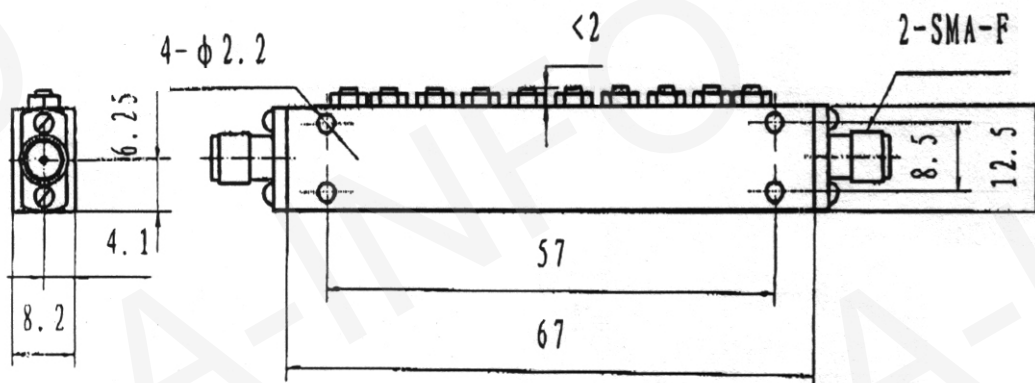

### Test Results

Temperature	Insertion Loss(dB)			Rejection(dB)		VSWR
	15.25GHz	14.50GHz	16GHz	14GHz	16.50GHz	
Low Temperature	-0.42	-1.23	-0.98	-63.3	-59.2	1.50
High Temperature	-0.59	-1.09	-1.15	-61.0	-61.4	1.49
Normal Temperature	-0.49	-1.14	-1.05	-62.4	-60.2	1.45