




**TEST REPORT**  
**For**  
**JXWBLB-T-BP-1560-200-LS**

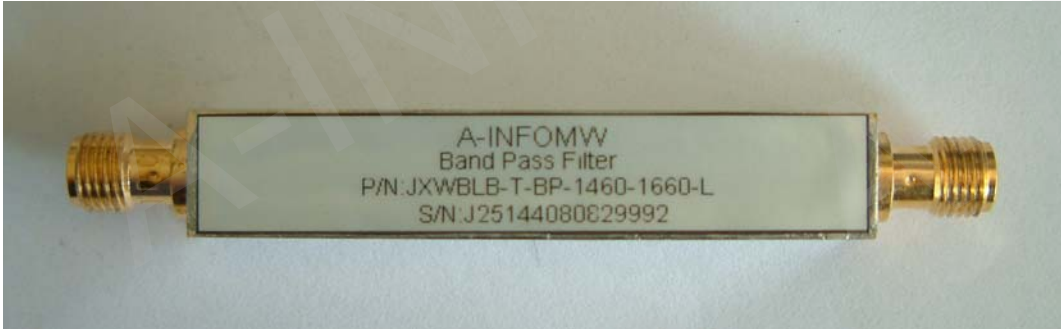

## Technical Specification

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| <b>1dB Pass Band(MHz)</b>           | 1460 – 1660                          |
| <b>I.L. at Center Frequency(dB)</b> | 2.0 max                              |
| <b>Rejection(dB)</b>                | 60 min @ 1230MHz<br>60 min @ 1890MHz |
| <b>VSWR</b>                         | 1.5 max                              |
| <b>Connectors</b>                   | SMA-Female                           |
| <b>Operating Temperature(°C)</b>    | -40 ~ +80                            |
| <b>Storage Temperature(°C)</b>      | -55 ~ +85                            |
| <b>Size(mm)</b>                     | 50.9 x 9.5 x 9.5                     |
| <b>Net Weight(Kg)</b>               | 0.015 Around                         |

## Test Results

| Temperature        | Insertion Loss at Center Freq. | Rejection(dB) |         | VSWR |
|--------------------|--------------------------------|---------------|---------|------|
|                    |                                | 1230MHz       | 1890MHz |      |
| Low Temperature    | -1.64                          | -71.8         | -72.2   | 1.30 |
| High Temperature   | -1.73                          | -72.9         | -73.1   | 1.31 |
| Normal Temperature | -1.68                          | -72.4         | -72.7   | 1.29 |