


TEST REPORT
For
JXWBLB-T-BP-162-3-LS

Technical Specification

Center Frequency(MHz)	162
1dB Bandwidth(MHz)	3 min
Insertion Loss(dB)	6 max
VSWR	1.5 max
Rejection(dB@ MHz)	45 min @ 153 45 min @ 171
Group Delay (nsec)	250 in passband
Impedance(Ohm)	50
Connectors	SMA-Female
Operating Temperature(°C)	-40 ~ +70
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.025 Around

Outline Drawing (Size: mm)

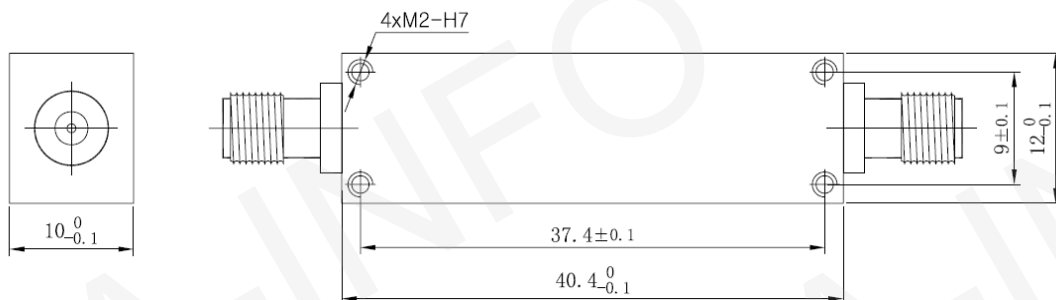

Test Results

Temperature	F0(GHz)	Lr0(GHz)	1dB BW	Rejection(dB)		VSWR	Group Delay (nsec)
				153MHz	171MHz		
Low Temperature	162	-4.91	4.82	-53.7	-48.6	1.39	200
High Temperature	162	-5.73	4.58	-54.5	-49.0	1.37	200
Normal Temperature	162	-5.30	4.70	-54.1	-48.8	1.41	200