



Test report is for reference only.


TEST REPORT
For
JXWBLB-T-BP-200-100-LS



Technical Specification

Frequency Range(MHz)	150-250
Insertion Loss at Center Frequency (dB)	1.1 max
VSWR	1.5 max
Rejection(dB @ MHz)	40 min @ 125 50 min @ 300
Impedance (Ohm)	50
Connectors	SMA-Female
Size(mm)	35 x 12 x 6.7
Operating Temperature(°C)	-40 ~ +80
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.015 Around

Outline Drawing (Size: mm)

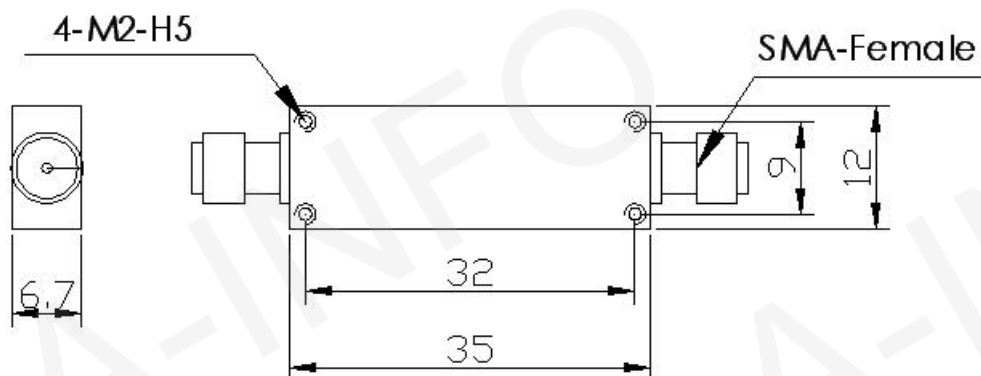

Test Results

Temperature	F0(MHz)	Lr0(dB)	-1dB BW	Rejection(dB)		VSWR
				1256MHz	300MHz	
Low Temperature	200	-0.41	113.26	-42.2	-59.8	1.40
High Temperature	200	-0.48	112.52	-42.4	-60.4	1.41
Normal Temperature	200	-0.45	112.96	-42.5	-60.3	1.39