



Test report is for reference only.


**TEST REPORT**  
**For**  
**JXWBLB-T-BP-3000-2000-13CS**



### Technical Specification

Frequency Range (GHz)	2.0-4.0
Insertion Loss (dB)	1.5 max
Rejection(dB @ GHz)	60 min @ 1.6 60 min @ 4.8
VSWR	2.0 max
Power Handle (W)	1 CW
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +85
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.11 Around

### Outline Drawing (Size: mm)

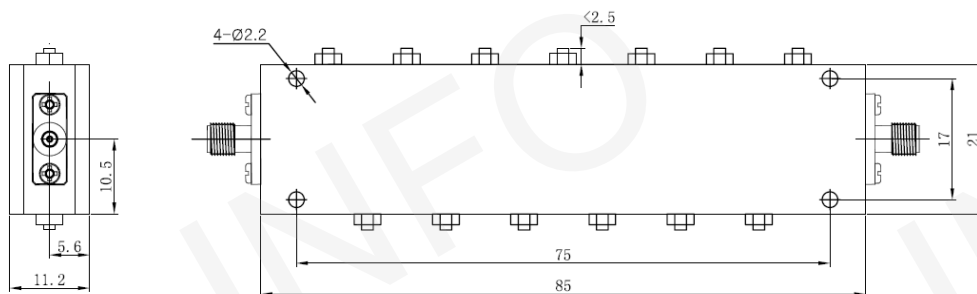

### Test Results

Temperature	Insertion Loss(dB)			Rejection(dB)		VSWR
	3GHz	2GHz	4GHz	1.6GHz	4.8GHz	
Low Temperature	-0.32	-0.82	-0.50	-61.7	-85.0	1.72
High Temperature	-0.42	-0.63	-0.58	-60.7	-85.0	1.69
Normal Temperature	-0.35	-0.74	-0.54	-61.2	-84.1	1.68