




TEST REPORT
For
JXWBLB-T-BP-3050-500/T-8CS



Technical Specification

Center Frequency(MHz)	3050
Insertion Loss(dB)	1 max
3dB Bandwidth(MHz)	500 min
Rejection(dB)	45 min@DC-2600MHz
	45 min@3500-18000MHz
VSWR	2.0 max
Group Delay(ns)	2 max at 80% pass band
Amplitude Matching(dB)	+/-1 max in pass band
Phase Matching(°)	+/-5 over 80% pass band
Connectors	SMA-Female
Operating Temperature(°C)	-30 ~ +70
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.14 Around

Outline Drawing (Size: mm)

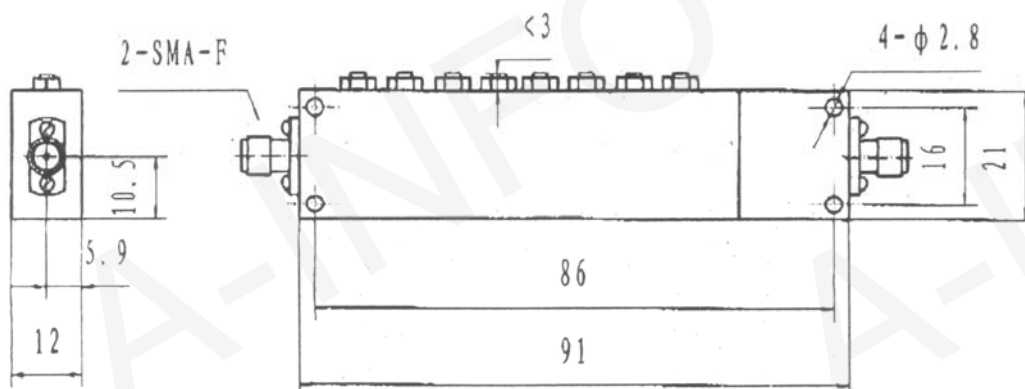

Test Results

Temp.	F0 (MHz)	IL (dB)	3dB BW (MHz)	Rejection(dB)		VSWR	Group Delay(ns)
				DC-2.6G	3.5-18G		
Low	3069.72	-0.31	587.94	-47.4	-45.7	1.68	2.0
High	3058.35	-0.37	586.78	-46.6	-47.3	1.72	2.0
Normal	3064.38	-0.34	580.18	-46.9	-46.6	1.70	2.0