


## Outline Drawing (Size: mm)

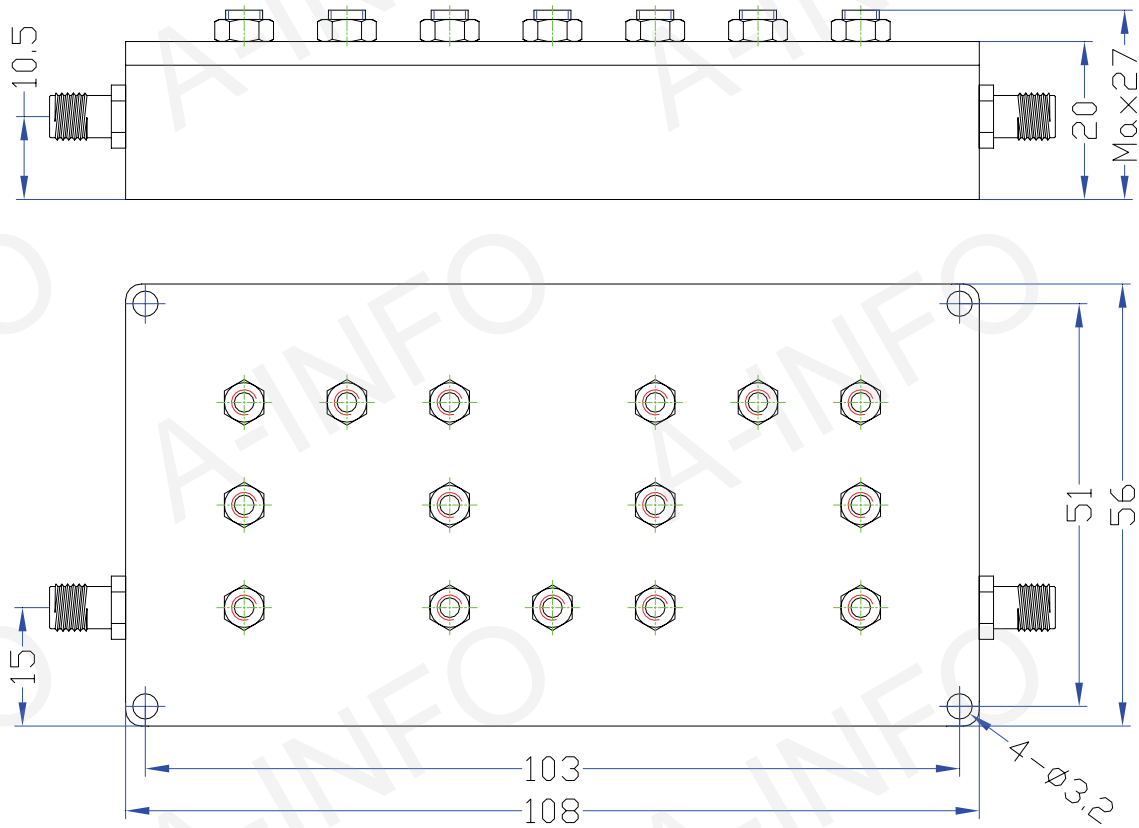

## Test Result Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	3300-3500	3300-3500
Center Frequency(MHz)	3400	3400
Bandwidth(MHz)	200	200
Insertion Loss (dB)	1.2 max	0.48 max
Rejection(dB)	60 min@3200MHz	69.5 min@3200MHz
	65 min@3600MHz	73.4 min@3600MHz
VSWR	1.5 max	1.11 max
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +80	-40 ~ +80