




TEST REPORT
For
JXWBLB-T-BP-3500-200-5CN



Technical Specification

Frequency Range(MHz)	3400 – 3600
Insertion Loss(dB)	2 max
Rejection(dB)	55 min @ 3000MHz & 4000MHz 70 min @ 2500MHz & 4400MHz
Ripple	0.5 max
Input Power (W)	15 CW
Return Loss(dB)	17 min
Impedance(Ohms)	50
Connector	N-Female
Operating Temperature(°C)	-40 ~ +70
Net Weight(Kg)	0.1 Around

Outline Drawing (Size: mm)

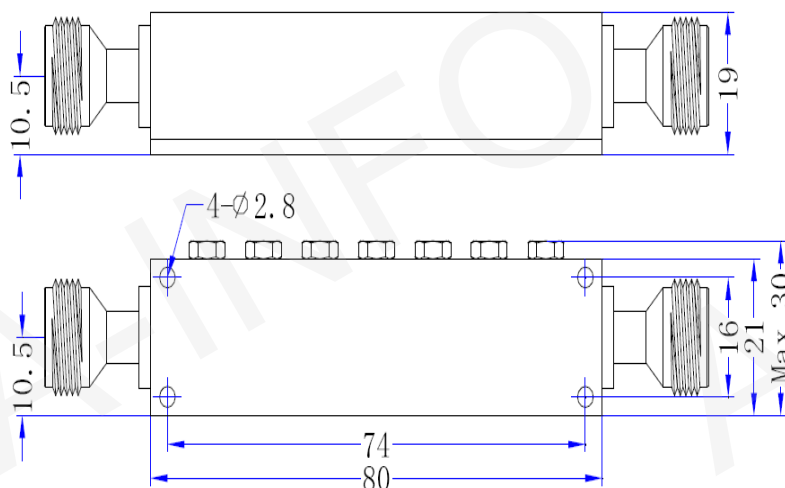

Test Results

Temperature	Insertion Loss (dB)	Ripple (dB)	Return Loss (dB)	Rejection(dB)			
				3000MHz	4000MHz	2500MHz	4400MHz
Normal Temperature	0.41	0.42	18.5	66.8	71.7	94.2	92.7
Low Temperature	0.43	0.46	18.1	67.1	71.3	93.0	91.3
High Temperature	0.48	0.47	18.3	66.9	71.8	92.5	93.8