


## Outline Drawing (Size: mm)

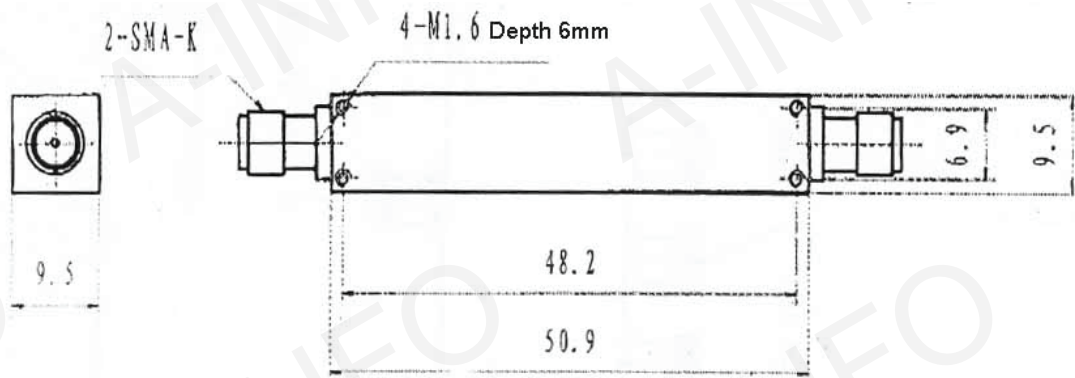

## Technical Specification

Item	Technical Specification
Center Frequency(f0)(MHz)	375
1dB Bandwidth(MHz)	250 min
Frequency Range(MHz)	250-500
Insertion Loss@f0 (dB)	1.5 max
VSWR	1.5 max
Rejection(dB)	60 min@150MHz
	60 min@600MHz
Impedance(Ohms)	50
Connectors	SMA-Female
Operating Temperature(°C)	-40 ~ +70
Storage Temperature(°C)	-55 ~ +85

## Test Results

Temperature	f0 (MHz)	I.L.@f0 (dB)	1dB Bandwidth (MHz)	Rejection(dB)		VSWR
				150MHz	600MHz	
Low	375	0.42	299.67	68.6	74.2	1.33
High	375	0.48	298.71	37.6	75.0	1.33
Normal	375	0.46	298.78	68.3	74.8	1.32