




**TEST REPORT**  
**For**  
**JXWBLB-T-BP-3900-600-8CS**



### Technical Specification

|                           |                |
|---------------------------|----------------|
| Frequency(MHz)            | 3600-4200      |
| Insertion Loss(dB)        | 1.5 max        |
| Rejection(dB)             | 80 min@2100MHz |
|                           | 80 min@5100MHz |
| VSWR                      | 1.5 max        |
| Connectors                | SMA-Female     |
| Operating Temperature(°C) | -40 ~ +80      |
| Net Weight(Kg)            | 0.065 Around   |

### Outline Drawing (Size: mm)

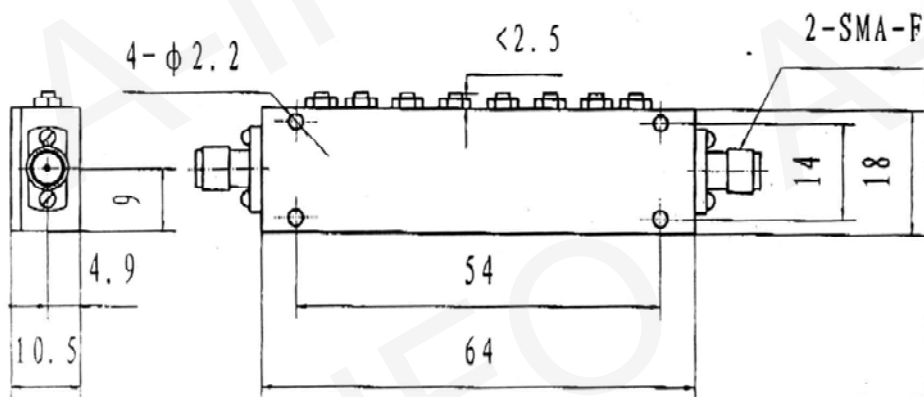

### Test Results

| Temperature | Insertion Loss(dB) |        |        | Rejection(dB) |        | VSWR |
|-------------|--------------------|--------|--------|---------------|--------|------|
|             | 3.9GHz             | 3.6GHz | 4.2GHz | 2.1GHz        | 5.1GHz |      |
| Low         | -0.40              | -0.41  | -0.59  | -86.3         | -84.3  | 1.41 |
| High        | -0.30              | -0.44  | -0.67  | -84.7         | -86.8  | 1.42 |
| Normal      | -0.35              | -0.46  | -0.64  | -85.4         | -85.7  | 1.40 |