



Test report is for reference only.


**TEST REPORT**  
**For**  
**JXWBLB-T-BP-3950-500/T-10CS**



## Technical Specification

3dB Pass Band	3.7 – 4.2GHz
Insertion Loss @ Center Frequency	2.0dB max
Rejection	50dB min @ 3500MHz 65dB min @ 4300MHz
VSWR	1.5 max (at 1dB Pass Band)
Connectors	SMA-Female
Operating Temperature	-40°C~ +70°C
Storage Temperature	-55°C~ +85°C
Net Weight	0.12 Kg Around

## Outline Drawing: (Unit: mm)

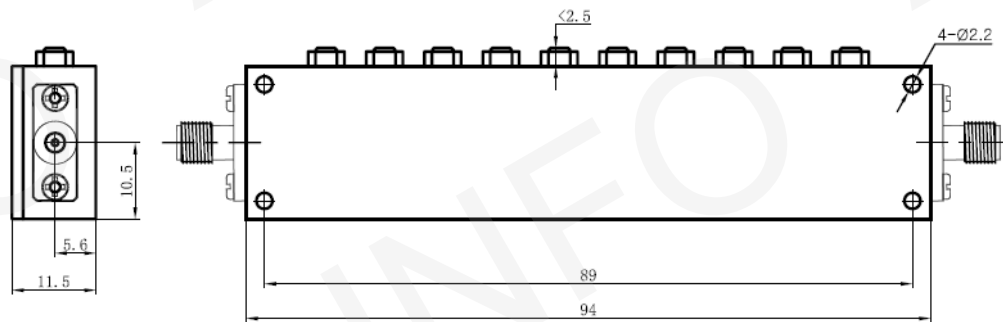

## Test Results

Temperature	Insertion Loss (dB)			Rejection (dB)		VSWR
	3.95GHz	3.7GHz	4.2GHz	3.5 GHz	4.3 GHz	
Low Temperature	-0.42	-2.07	-1.29	-66.4	-50.2	1.44
High Temperature	-0.54	-1.10	-2.25	-64.6	-53.0	1.42
Normal Temperature	-0.47	-1.23	-1.47	-65.5	-51.7	1.43