




TEST REPORT
For
JXWBLB-T-BP-4095-680-LS

Technical Specification

1dB Band Pass Frequency (MHz)	3755-4435
Insertion Loss at center frequency(dB)	2.0
Rejection(dB)	80 min@2.2GHz
	40 min@5.0GHz
VSWR	1.5 max
Connector	SMA-Female
Operation Temperature(°C)	-40 ~ +70
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.07 Around

Outline Drawing (Size: mm)

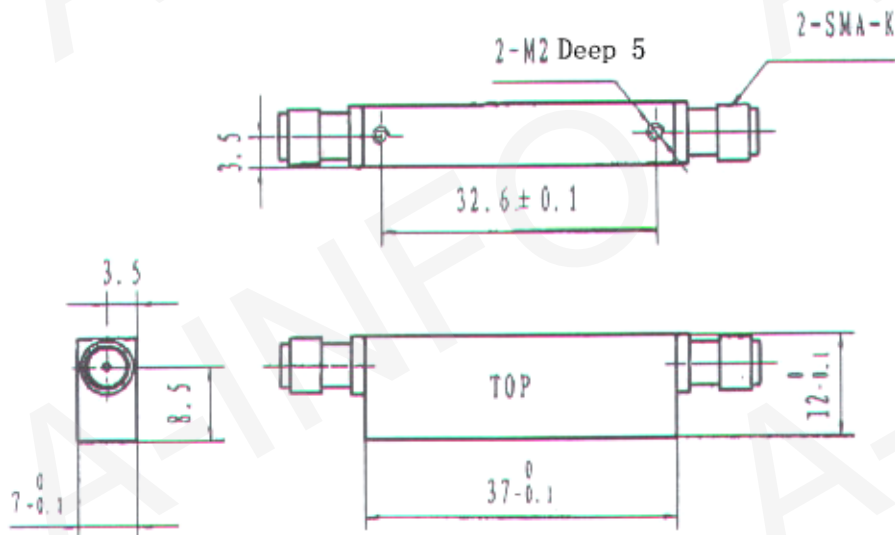

Test Results

Temperature	F0 (MHz)	I.L. at F0 (dB)	1dB Bandwidth (MHz)	Rejection(dB)		VSWR
				2.2GHz	5.0GHz	
Low	4095	-0.90	694.35	-85.0	-43.6	1.46
High	4095	-0.95	698.87	-85.5	-43.9	1.47
Normal	4095	-0.93	690.53	-85.5	-43.8	1.46