




TEST REPORT
For
JXWBLB-T-BP-416.25-6.5/T-LN



Technical Specification

3dB Pass Band(MHz)	413-419.5
I.L. at Center Freq.(dB)	5 max
Rejection(dB)	40 min@446MHz
VSWR	1.5 max
Connectors	N-Female
Operating Temperature(°C)	-0~ +50
Storage Temperature(°C)	-55~ +85
Net Weight(Kg)	0.1 Around

Outline Drawing (Size: mm)

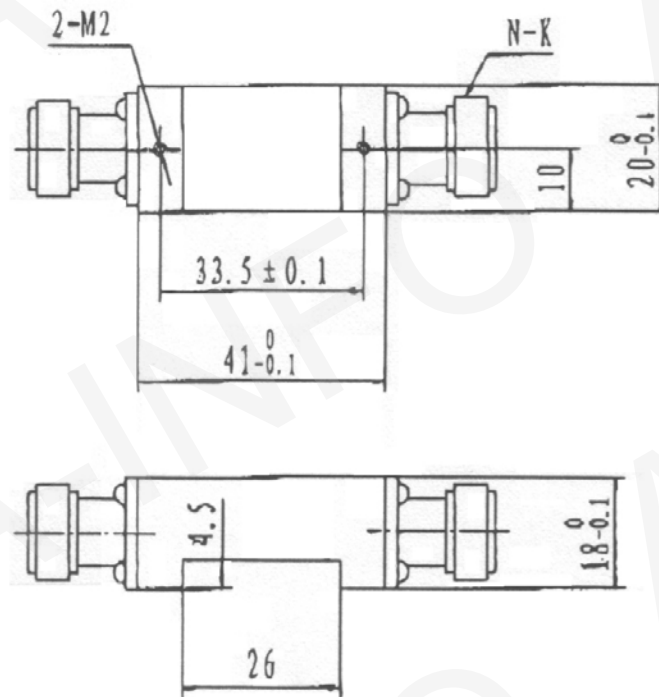

Test Results

Temperature	Insertion Loss(dB)			Rejection(dB)	VSWR	3dB Bandwidth (MHz)
	416.25MHz	413MHz	419.5MHz	446MHz		
Low	-4.21	-4.60	-4.47	-57.2	1.33	14.93
High	-4.48	-4.83	-4.72	-58.5	1.35	14.71
Normal	-4.35	-4.71	-4.57	-57.6	1.34	14.82