


Outline Drawing (Size: mm)

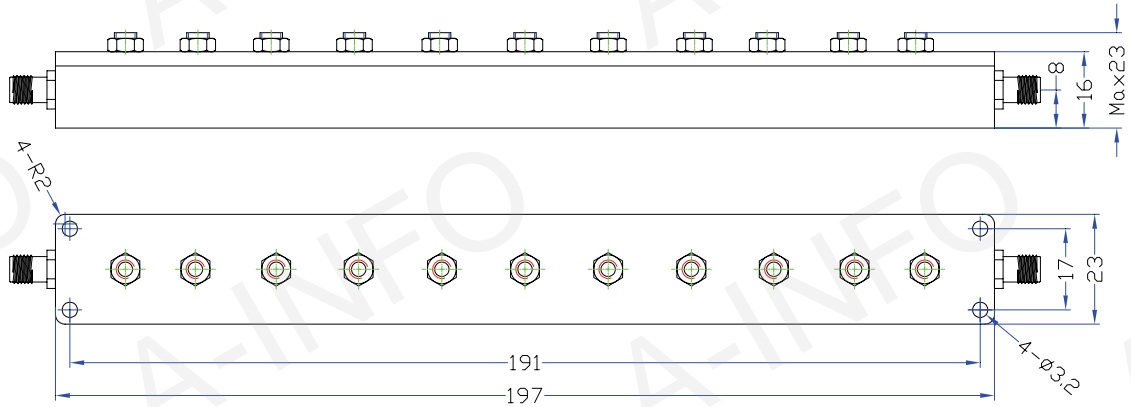

Test Result Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	4000-4400	4000-4400
Insertion Loss (dB)	0.8 max	0.64 max
Rejection(dB)	70 min@3450MHz	92 min@3450MHz
	50 min@4500MHz	51.7 min@4500MHz
VSWR	1.50	1.13
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +80	-40 ~ +80