


## Outline Drawing (Size: mm)

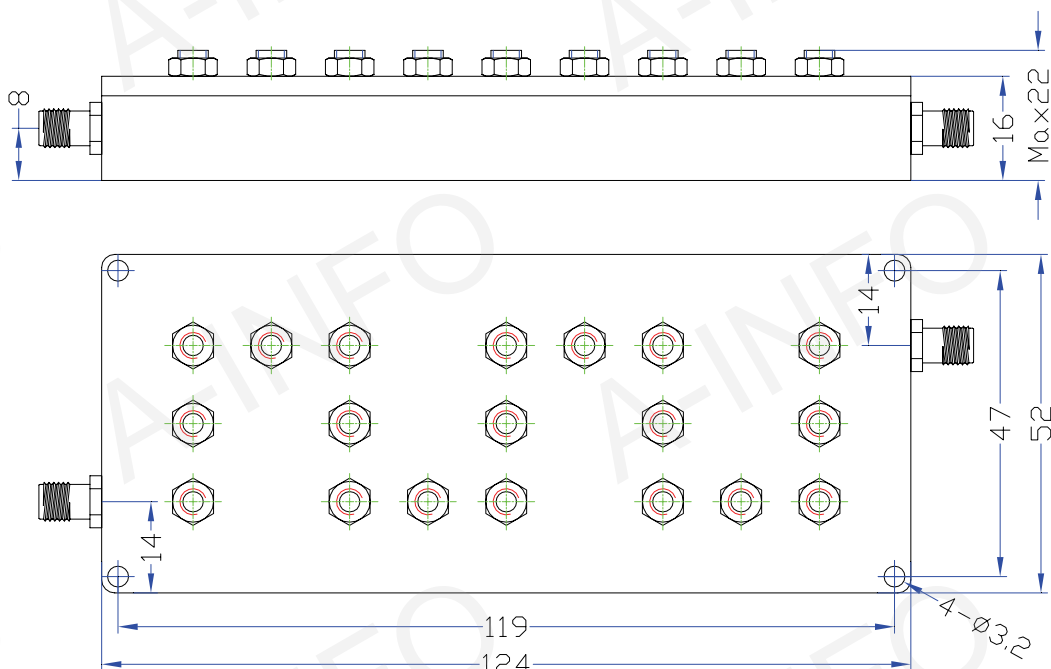

## Test Result Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	4600-4700	4600-4700
Insertion Loss (dB)	2.0 max	1.54 max
Rejection(dB)	55 min@4550MHz	59.6 min@4550MHz
	55 min @4750MHz	64.4 min @4750MHz
VSWR	1.50	1.14
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +70	-40 ~ +70
Storage Temperature(°C)	-55 ~ +85	-55 ~ +85