




Test report is for reference only.


TEST REPORT
For
JXWBLB-T-BP-485-5/T-4CS

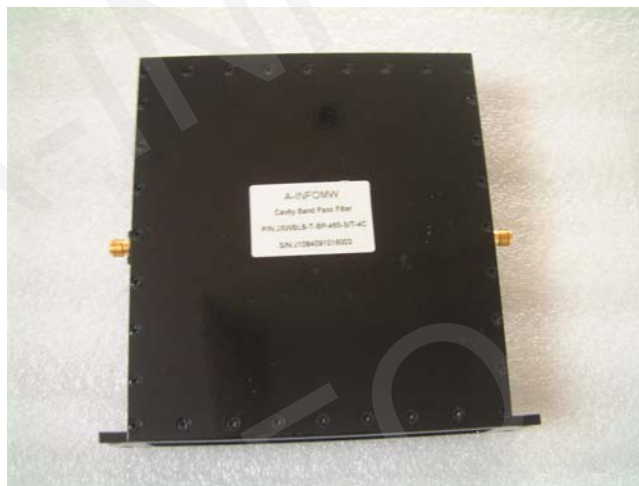

Technical Specification

Center Frequency(f0)(MHz)	485
3dB Bandwidth(MHz)	5
Number of Section	4 sections
VSWR	1.3:1 max
Insertion Loss(dB)	1.9 typ., 2.5 max
Impedance(ohms)	50
Average Power(W)	5
Connector	SMA-Female
Size (L x W x H)(mm)	120.65 x 31.5 x 134.11
Humidity	0 to 95%
Vibration	10G's, 10-2000Hz
Shock	20G's 1/2 sine, 11ms max
Operating Temp.(°C)	-20°C ~+50°C
Net Weight(Kg)	0.57 Around

Outline Drawing (Size: mm)

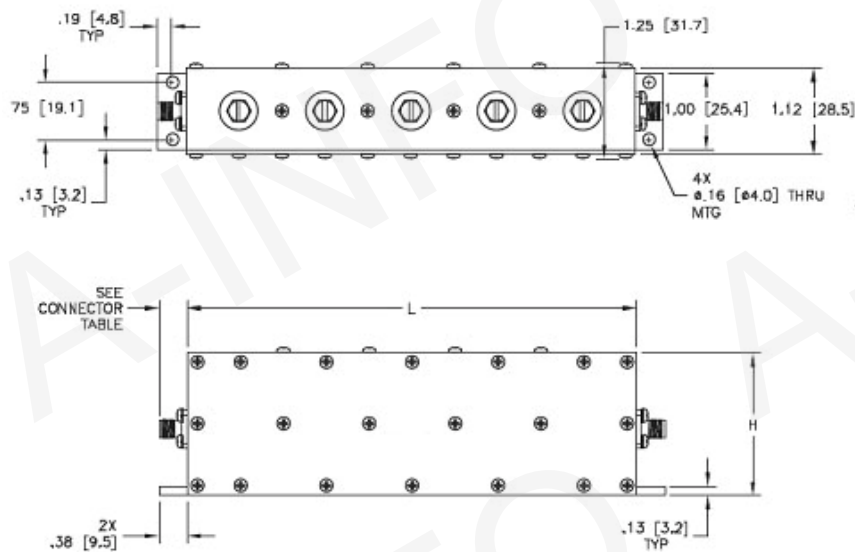

Test Results

Temperature	F0 (MHz)	Lr0 (dB)	-3dB BW (MHz)	-40dB BW (MHz)	-60dB BW (MHz)	VSWR
Low Temperature	483.88	-1.35	4.79	14.07	24.83	1.3 max
High Temperature	485.11	-1.40	4.81	14.01	24.78	1.3 max
Normal Temperature	484.97	-1.42	4.81	14.04	24.79	1.3 max