



Test report is for reference only.


TEST REPORT
For
JXWBLB-T-BP-6000-4000-13CS



Technical Specification

Frequency Range (GHz)	4.0-8.0
Insertion Loss (dB)	1.5 max
Rejection(dB @ GHz)	60 min @ 3.2 60 min @ 9.6
VSWR	2.0 max
Power Handle (W)	1 CW
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +85
Storage Temperature(°C)	-55 ~ +85
Net Weight(Kg)	0.09 Around

Outline Drawing (Size: mm)

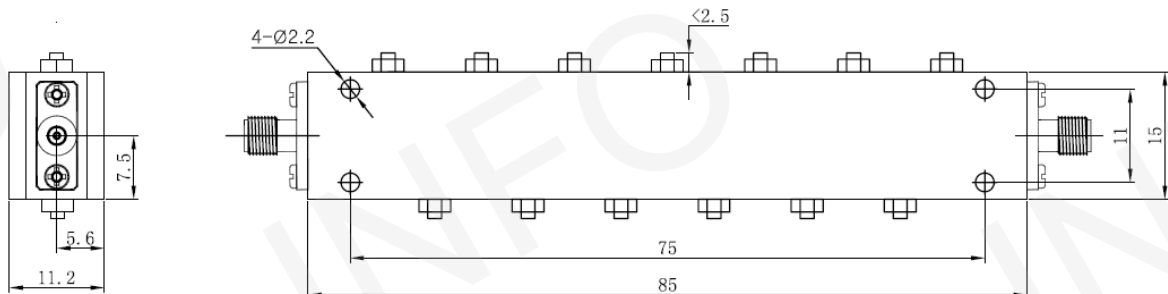

Test Results

Temperature	Insertion Loss(dB)			Rejection(dB)		VSWR
	6GHz	4GHz	8GHz	3.2GHz	9.6GHz	
Low Temperature	-0.20	-0.62	-0.31	-63.5	-77.3	1.79
High Temperature	-0.29	-0.51	-0.43	-62.3	-78.3	1.78
Normal Temperature	-0.29	-0.55	-0.35	-63.2	-77.0	1.81