


## Outline Drawing (Size: mm)

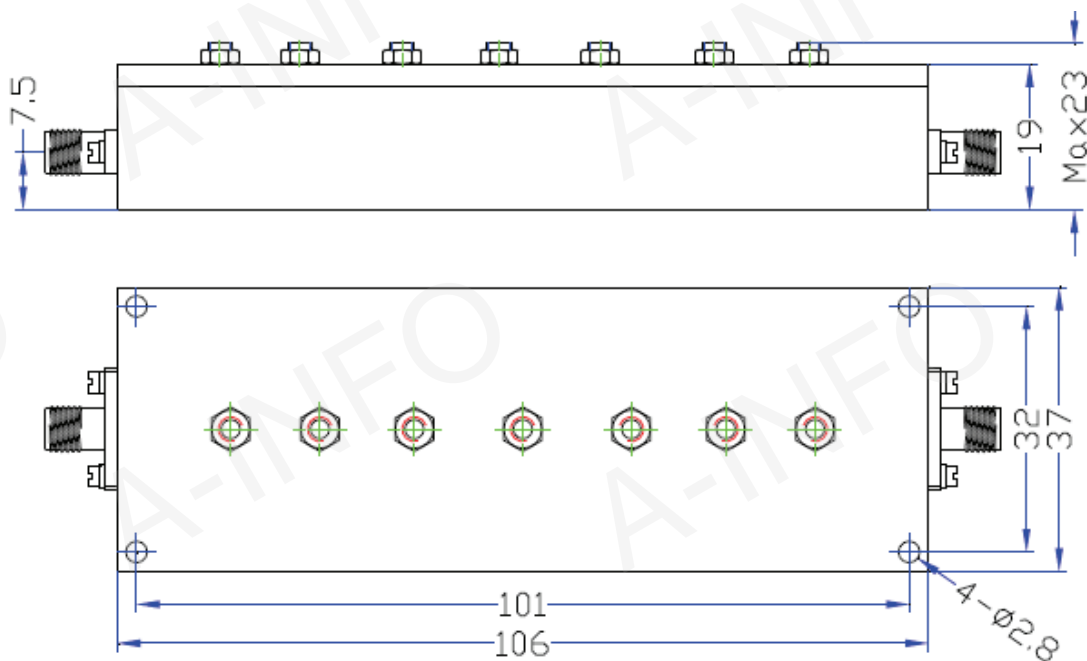

## Test Result Table

Item	Technical Specification	Test Results
Frequency Range(MHz)	8303-8331	8303-8331
Center Frequency(MHz)	8317	8317
Insertion Loss (dB)	1.2 max	0.8 max
Rejection(dB)	80 min@F0±500	85 min@F0±500
VSWR	1.3 max	1.18 max
Connectors	SMA-Female	SMA-Female
Operating Temperature(°C)	-40 ~ +70	-40 ~ +70